

# FEEDTHROUGH FOR ELECTRICAL CONNECTORS

**Publication number:** WO2004030159 (A1)

**Publication date:** 2004-04-08

**Inventor(s):** DARLEY DEREK IAN [AU]; MCCUSKER DESMOND ANDREW [AU]; MILOJEVIC DUSAN [AU]; PARKER JOHN L [AU] +

**Applicant(s):** COCHLEAR LTD [AU]; DARLEY DEREK IAN [AU]; MCCUSKER DESMOND ANDREW [AU]; MILOJEVIC DUSAN [AU]; PARKER JOHN L [AU] +

**Classification:**

- **international:** A61N1/05; H01R13/52; H01R43/00; H01R43/24; A61N1/05; H01R13/52; H01R43/00; H01R43/20; (IPC1-7): A61N1/05; H01R43/00

- **European:** A61N1/05; A61N1/05H; H01R13/52R; H01R43/24

**Application number:** WO2003AU01288 20030930

**Priority number(s):** AU20020951734 20020930; AU20020951738 20020930; AU20020951739 20020930; AU20020951740 20020930

**Also published as:**

US2006141861 (A1)  
US7396265 (B2)  
US2008209723 (A1)  
US2006208289 (A1)  
JP2006501605 (T)


more >>

**Cited documents:**

US6414835 (B1)  
US6336269 (B1)  
US2001039374 (A1)  
US5833714 (A)  
XP002230974 (A)

**Abstract of WO 2004030159 (A1)**

A method (10) of forming an electrically conducting feedthrough. The method (10) comprises a first step (11) of forming an electrically conductive structure (21) comprising a sacrificial component and a non-sacrificial component. At least a portion of the non-sacrificial component can then be coated with a relatively electrically insulating material (35) prior to removal of at least a portion of the sacrificial component from the electrically conductive structure. The structure of the feedthrough provides electrical connection through the wall of a housing of an implantable component while preventing unwanted transfer of materials between the interior of the component and the surrounding environment.

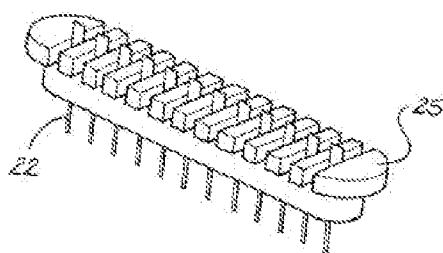

Data supplied from the **espacenet** database — Worldwide

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
8 April 2004 (08.04.2004)

PCT

(10) International Publication Number  
**WO 2004/030159 A1**

(51) International Patent Classification?: **H01R 43/00**,  
A61N 1/05

Drive, Westleigh, New South Wales 2120 (AU). PARKER,  
John, L. [AU/AU]; 9 Moore Street, Roseville, New South  
Wales 2069 (AU).

(21) International Application Number:  
PCT/AU2003/001288

(74) Agent: F B RICE & CO; 605 Darling Street, Balmain,  
NSW 2041 (AU).

(22) International Filing Date:  
30 September 2003 (30.09.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
2002951734 30 September 2002 (30.09.2002) AU  
2002951738 30 September 2002 (30.09.2002) AU  
2002951739 30 September 2002 (30.09.2002) AU  
2002951740 30 September 2002 (30.09.2002) AU

(81) Designated States (national): AU, AG, AI, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE,  
GH, GM, GR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,  
KZ, LC, LK, LR, LS, LU, LV, MA, MD, MG, MK,  
MN, MW, MX, MZ, NL, NO, NZ, OM, PG, PH, PL, PT,  
RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR,  
TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, EG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (for all designated States except US):  
**COCHLEAR LIMITED** [AU/AU]; 14 Mars Road,  
Lane Cove, New South Wales 2066 (AU).

(72) Inventors; and


(75) Inventors/Applicants (for US only): DARLEY, Derek,  
Ian [AU/AU]; 18 Northcott Road, Cromer Heights, New  
South Wales 2099 (AU). MCCUSKER, Desmond, An-  
drew [AU/AU]; 9 Evans Street, Balmain, New South Wales  
2041 (AU). MILOJEVIC, Dusan [AU/AU]; 63 Duneba

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: FEEDTHROUGH FOR ELECTRICAL CONNECTORS

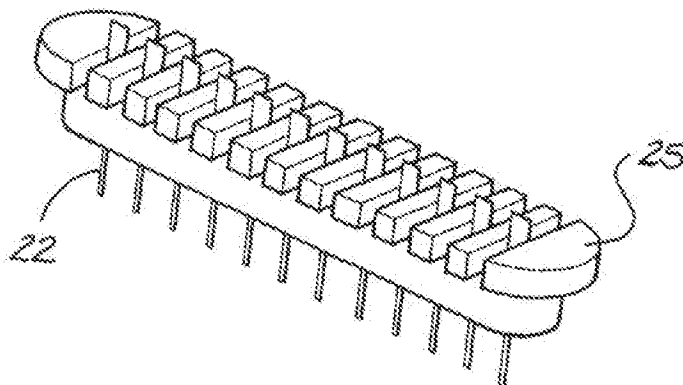

(57) Abstract: A method (10) of forming an electrically conducting feedthrough. The method (10) comprises a first step (11) of forming an electrically conductive structure (21) comprising a sacrificial component and a non-sacrificial component. At least a portion of the non-sacrificial component can then be coated with a relatively electrically insulating material (35) prior to removal of at least a portion of the sacrificial component from the electrically conductive structure. The structure of the feedthrough provides electrical connection through the wall of a housing of an implantable component while preventing unwanted transfer of materials between the interior of the component and the surrounding environment.

WO 2004/030159 A1

## "Feedthrough for electrical connectors"

### Field of the Invention

5       The present invention relates to a method of forming relatively small or miniature electrical connector systems. More specifically, the present invention relates to a method of forming hermetically sealed but electrically conducting feedthroughs for devices, including biosensors and implantable devices. Electrically conducting feedthroughs are also described. Examples of implantable devices that can use such  
10 feedthroughs include the implantable component of a cochlear implant hearing prosthesis.

### Background of the Invention

15       The term 'feedthrough' as used herein refers to the provision of an electrically conducting path extending through an insulative member, from one side of the insulative member to another. The electrically conducting path may extend from the interior of a hermetically sealed container or housing on one side of the insulative member, to an external location outside the container or housing on the other side of  
20 the insulative member. Typically, a conductive path is provided by an electrically conductive pin, which is electrically insulated from the container or housing by an electrically insulating body surrounding the pin.

      A feedthrough device can therefore allow one or more electrical connections to  
25 be made with electronic circuitry or components within an hermetically sealed container or housing, whilst protecting the circuitry or components from any damage or malfunction that may result from exposure to the surrounding environment.

      There are many applications for feedthrough devices that provide an electrically  
30 conducting path through the wall of a housing or container whilst also sealing the electrical container or housing from its ambient environment. Historically, the first such devices were widely used in vacuum technology allowing for the transfer of signals between chambers of differing pressures. In such applications, the vacuum tubes had to be sealed because they could only operate under low-pressure conditions.

Over time, and with the advent of electrical devices capable of being implanted in body tissue to provide therapy to a patient, such as cardiac pacemakers, defibrillators and cochlear implants, the need to provide feedthrough devices with improved hermeticity has become increasingly important. As the environment of living tissue and body fluids is relatively corrosive and devices may contain materials which may be detrimental if exposed to the patient, a hermetic feedthrough device is used to provide a barrier between the electronic components of the device and the external corrosive environment of the human body. With implantable medical devices in particular, it is critically important that the hermetic seal of the device be physically rugged and long lasting. For this reason, stringent requirements are imposed on the hermeticity of an implanted device, typically requiring a seal that provides a leakage rate of less than  $10^{-8}$  cc/sec.

Given this, feedthroughs used in medical implant applications, such as those used in pacemaker devices and cochlear implants, typically consist of a ceramic or glass bead that is bonded chemically at its perimeter through brazing or the use of oxides, and/or mechanically bonded through compression, to the walls of the sealed package. A suitable wire or other conductor passes through the centre of the bead, and this wire or conductor must also be sealed to the bead through chemical bonds and/or mechanical compression. Such feedthroughs are typically cylindrical and the wire(s) or conductor(s) mounted within the bead are centred or mounted in a uniform pattern, centrally within the bead.

Other materials and processes are known for making feedthroughs which rely, for example, on use of aluminium oxide ceramic and binders. These types of feedthroughs are widely used for cardiac implants and cochlear implants. One of the processes for making such a feedthrough consists of pre-drilling holes in a sintered ceramic plate and then forcing electrical conductive pins through the holes. While useful, this method is tedious and slow and does not necessarily guarantee a hermetic seal and generally results in unsatisfactory leakage rates on testing and low yields. A second method involves inserting the conductive pins into an unsintered (or 'green') ceramic plate and then curing the assembly by firing to achieve a hermetic seal. A major disadvantage of this last method is that, historically the manufacturing process has been performed by hand. Such a method of manufacture can lead to inaccuracies and be time consuming, expensive and labour intensive. Moreover, the feedthrough devices resulting from such a process do not necessarily have precisely positioned

electrical conductors, with the position of the conductors being greatly dependent upon the process itself. Further, as the conductors are typically wires being of a general cylindrical shape and configuration, the size and shape of the conductor extending from the insulative material of the feedthrough is generally the same as the conductor  
5 embedded in the insulative material of the feedthrough.

As implantable devices continue to develop and become thinner, smaller and more electronically sophisticated, the requirements of the feedthrough have also increased. In cochlear implants, for example, where there is presently typically  
10 somewhere between 22-24 electrode leads, there is a need for 22-24 conductive pins passing through the feedthrough device. As the desire for more electrodes and smaller feedthroughs increases, the demands placed upon the design of the traditional feedthrough also increases. The problems in fabricating such a feedthrough device on such a large scale are therefore quite significant, especially when one considers the  
15 relatively high degree of labour intensity and specialisation of current fabricating methods.

While the above described prior art feedthrough devices and fabrication methods have proven successful, it is a relatively slow and labour intensive process to  
20 manufacture such devices. The method of manufacture of the feedthrough also presents limitations as to the construction of the feedthrough.

Any discussion of documents, acts, materials, devices, articles or the like which has been included in the present specification is solely for the purpose of providing a  
25 context for the present invention. It is not to be taken as an admission that any or all of these matters form part of the prior art base or were common general knowledge in the field relevant to the present invention as it existed before the priority date of each claim of this application.

### 30 Summary of the Invention

Throughout this specification the word "comprise", or variations such as "comprises" or "comprising", will be understood to imply the inclusion of a stated element, integer or step, or group of elements, integers or steps, but not the exclusion of  
35 any other element, integer or step, or group of elements, integers or steps.

The present invention is directed to a method of forming a feedthrough that preferably addresses at least some of the problems with prior art processes.

The present invention also potentially allows more flexibility in the design of feedthrough devices by providing control over the position and configuration of the conductors through the device, the physical shape and size of the device, the number of conductors used and the overall hermeticity of the feedthrough device.

According to a first aspect, the present invention is a method of forming an electrically conducting feedthrough comprising the steps of:

- (i) forming an electrically conductive structure comprising a sacrificial component and non-sacrificial component;
- (ii) coating at least a portion of the non-sacrificial component with a relatively electrically insulating material; and
- (iii) removing at least a portion of the sacrificial component from the electrically conductive structure.

The electrically insulating material is preferably a ceramic material or a hermetic glass material suitable for use in a feedthrough application.

In one embodiment, the electrically insulating material can be coated on the non-sacrificial component and not coated or moulded on to any portion of the sacrificial component of the conductive structure. In another embodiment, the electrically insulating material can be coated on the non-sacrificial component and at least a portion of the sacrificial component of the conductive structure. Still further, step (iii) can comprise removing at least that portion of the sacrificial component on to which the insulative material has not been coated.

In one embodiment, the electrically conductive structure can be formed from an electrically conductive material. The electrically conductive material can be a metal, a metal alloy, an electrically conductive ceramic, an electrically conductive composite, or an intrinsically or extrinsically electrically conductive polymer. In a preferred embodiment, the structure is formed from a film or shim of electrically conductive material. In one such embodiment, the electrically conductive structure can be formed from a film or shim of platinum. Use of other materials such as iridium can be envisaged.

The film or shim can be formed into a shape comprising the sacrificial component and the non-sacrificial component of the electrically conductive structure. In this embodiment, it will be appreciated that that portion of the film or shim comprising the non-sacrificial component may comprise more than one portion of the film or shim. Similarly, that portion of the film or shim comprising the sacrificial component may comprise more than one portion of the film or shim.

In one embodiment, the electrically conductive component may comprise a film or shim having a shape comprising two or more separated conductive elements extending between respective transverse support members. These conductive elements can be substantially elongate. In a further embodiment, the film or shim can have at least ten separated substantially elongate members extending between the respective support members. In one embodiment, the support members are substantially parallel with respect to each other. Still further, the support members can be straight and in a parallel arrangement. In another embodiment, at least one, and preferably all, of the conductive elements can be non-linear. In another embodiment, at least one, and preferably all, of the conductive elements can have a length that is greater than the shortest distance between the respective transverse support members. In a still further embodiment, the surface of at least one, and preferably all, of the conductive elements can be non-linear and/or define an interface path between the conductive element and the insulating material that is longer than the shortest distance between the respective transverse support members.

The separation of the conductive elements is preferably such that the electrically insulating material can be coated between the elements and so prevent electrical conduction between the respective elements at completion of the method according to the first aspect.

In a preferred embodiment, the shape of the electrically conductive component can be formed in step (i) by punching the shape, using a suitably shaped and dimensioned punching tool, from a film of electrically conductive material, such as platinum.

In another embodiment, the shape of the electrically conductive component can be formed in step (i) by using electrical discharge machining (EDM), which is also

known as spark erosion, to remove unwanted portions of the film. In a preferred embodiment, the EDM equipment used in the process has a cutting tool comprising an electrode. The cutting tool does not physically cut the sheet but instead relies on the equipment generating a series of electrical discharges between the electrode and the film in a dielectric fluid. The electrical discharges serve to vaporise the film in the region adjacent the cutting tool.

In a preferred embodiment, the cutting tool has a size and shape that matches the size and shape of the portion of the film to be removed from the film during the machining steps. In this embodiment, it is preferred that the tool is brought adjacent the film at a number of different locations so as to remove differing portions of the film. This multiple use of the tool preferably serves to gradually build up the pattern of the electrically conductive component.

In a preferred embodiment, the cutting tool can be used to form a series of discrete linear conductive members from a film of platinum or other suitable metal or metal alloy. The linear conductive members can be aligned in a parallel arrangement.

In another embodiment, the cutting tool can be used to form a series of discrete linear conductive members from a plurality of films of platinum or other suitable material stacked one atop the other. In this manner, a large number of electrically conductive components can be prepared with a single cutting motion of the cutting tool. In such an embodiment, a method known as "wire cutting" can be employed. This method operates in a similar manner to EDM/spark erosion methods wherein a wire is passed through a stack of films or foils of conductive material with this wire becoming the electrode causing the erosion of material adjacent the electrode. By using this method a plurality of films or foils can be patterned simultaneously, resulting in a process that is capable of mass producing patterned conductive films or foils to be used to create the feedthrough device of the present invention.

In the method, at least a portion of each of the substantially elongate members extending between the support members are coated with the electrically insulating material (step (ii) is described in more detail below). As mentioned, the electrically insulating material can be alumina but other suitable ceramic types can be envisaged.



In another embodiment, the step of forming the electrically conductive structure can comprise the steps of:

- (a) forming a relatively electrically insulating disc having an outer periphery defining a plurality of outwardly extending teeth having notches therebetween; and
- 5 (b) winding an electrically conductive element around the disc such that at least some of the notches have a portion of the conductive element passing therethrough.

In this embodiment, the electrically insulating disc can be formed of a ceramic material such as alumina. The disc can have a plurality of equally spaced notches and teeth about its outer periphery.

In this embodiment, each of the notches can receive a conductive element. Preferably, a single metal wire is used for each disc. The wire preferably comprises platinum wire. The wire can have a diameter of about 25 $\mu$ m.

Once the conductive element has been wound about the disc and passed through each of the notches, the insulating disc and surrounding conductive element can be overmoulded with a coating of insulating material as defined in step (ii) of the method described above. Those portions of the conductive element not extending through the feedthrough can then be removed.

In a still further embodiment, the step of forming the electrically conductive structure comprises a step of forming a sheet of platinum having a plurality of integrally attached substantially elongate members extending outwardly from at least a portion of the periphery thereof. In a preferred embodiment, the elongate members extend outwardly and in a direction out of the plane of the sheet. For example, the elongate members can extend outwardly and upwardly from the sheet. In this embodiment, the elongate members can be rectangular in shape.

In this embodiment, the sheet can be rectangular or square. In this embodiment, at least three sides of the sheet can have elongate members extending at least out of the plane of the sheet.

In a still further embodiment, the step of forming the electrically conductive structure comprises a step of spirally coiling an electrically conductive wire, such as

platinum wire, along at least a portion of a length of a screw thread. Once positioned, an insulating layer can be moulded around the thread and the wire. Once the insulating layer has cured, the screw thread can be withdrawn from the insulating material so leaving the coiled wire embedded within the inner surface of the insulating layer.

5

The step of coating the electrically conductive structure preferably comprises a step of mounting or clamping the conductive structure in a mould and then moulding a coating of the insulating material on and/or around the conductive structure.

10 Where the conductive structure comprises a plurality of substantially elongate members formed from a film or shim of, for example, platinum, the insulating material is preferably coated or moulded around at least a portion of the substantially elongate members of the conductive structure. In this embodiment, said portion of the substantially elongate members comprises a portion of the non-sacrificial component of  
15 the electrically conductive structure. While this embodiment envisages the film or shim being shaped as desired prior to clamping or mounting in the mould, it will be appreciated that a film could be firstly mounted or clamped in the mould and then shaped or punched as required prior to the moulding or coating step.

20 Where the conductive structure comprises an insulative disc having a notched outer surface and a conductive element passing through the notches around the disc, the insulating material is preferably moulded around the disc such that at least those portions of the conductive element passing through the notches of the disc outer surface are encapsulated in the insulating material.

25

Where the conductive structure comprises a sheet having a plurality of substantially elongate members extending at least out of the plane of the sheet, the insulating material is preferably moulded to both sides of the sheet and elongate members, thereby encapsulating at least a portion of the members in the insulating  
30 material.

Where the conductive structure comprises a coiled wire embedded within the inner surface of an insulating layer, the orifice left by the withdrawal of the screw thread can be filled with insulating material.

35

In a preferred embodiment, the mould can comprise an injection mould. In one embodiment, step (ii) of the method can comprise a step of using powder injection moulding (PIM) to mould the insulating material around the desired portion of the conductive structure.

5

In this moulding process, insulating material such as fine ceramic powder is mixed with a carrier chemical, typically called binder, and homogenised to create a feedstock for the injection mould. The presence of the binder serves to make the feedstock sufficiently fluid to be used in an injection moulding process. Once  
10 moulded, the insulating material can be allowed to at least partially set. The resulting moulded part is hereinafter called the green body.

Once the green body is formed, the sacrificial component of the electrically conductive structure can be removed. During this step, it is possible that a portion of  
15 the green body may also need to be removed. In one embodiment, the sacrificial component can be removed by being cut, abraded or ground away. In this regard, physical cutting with a knife, or laser cutting techniques, are envisaged.

Where the electrically conductive structure comprises the plurality of  
20 substantially elongate members extending between the transverse members, the sacrificial component preferably includes at least the transverse support members so leaving a plurality of electrically insulated elongate members extending through the green body.

25 Where the electrically conductive structure comprises an insulating disc having a conductive element, such as a wire, passing through a plurality of notches, the sacrificial component can comprise at least some of that part of the conductive element not passing through the notches. On removal of the remainder of the conductive  
30 element, one is left with an insulative member having a conductive member passing therethrough at each location where a notch existed in the outer surface of the original insulative disc.

Where the electrically conductive structure comprises a sheet having a plurality  
of substantially elongate members extending at least out of the plane of the sheet, the  
35 sacrificial component preferably comprises the sheet from which each of the elongate members extend. With the sheet and substantially elongate members supported on one

side by an insulative layer, the sheet can be punched from the structure leaving a ring of insulating material with the now separated elongate conductive members supported thereon. Another layer of insulating material can then be moulded between and around the ring thereby forming an insulating member having the elongate members extending  
5 therethrough from one face to the other.

Where the electrically conductive structure comprises a coiled wire embedded within an insulating coating, the sacrificial component preferably comprises adjacent portions of respective turns of the coiled wire.

10

In a still further embodiment, the method can comprise an additional step of debinding the green body. In this step, any binder in the green body is preferably extracted from the insulative material. In one embodiment, this step can comprise a chemical debinding in which the green body is soaked in a suitable solvent. In another  
15 embodiment, this step can comprise exposing the green body to a relatively elevated temperature. This temperature is preferably sufficient to boil off the binder from the green body while not causing the green body to undergo sintering. In one embodiment, the temperature is between about 150°C and 200°C.

20 During the debinding step, the insulating material preferably shrinks in dimension. This debinded insulating material member is hereinafter called a brown body.

When ready, the brown body can undergo a sintering step. The sintering step  
25 preferably comprises exposing the brown body to a suitable elevated temperature. In one embodiment, the sintering step can comprise exposing the brown body to a sintering temperature of about 1700°C. During the sintering step, the insulating member undergoes further shrinkage and becomes relatively more robust. The shrinkage of the insulating member also serves to form a hermetic seal at the interface  
30 between the embedded conductive members and the surrounding sintered insulating member.

Once complete, the insulating member with the conductive members extending therethrough can be brazed into an orifice in the wall of a unit adapted to receive the  
35 feedthrough. Electrical connection can then be made to each end of the respective

conductive members as required to form respective electrical conductive paths through the insulating body of the feedthrough.

According to a further aspect, the present invention is a feedthrough formed  
5 using one of the methods described herein.

According to a still further aspect, the present invention is a feedthrough comprised of one or more relatively electrically conductive structures extending through and embedded within a relatively electrically insulating body, wherein the one  
10 or more electrically conductive structures are formed from a film or shim of an electrically conductive metal or metal alloy.

In one embodiment, the electrically conductive structures have an overall elongate length of at least 7mm and, more preferably, about 7.8mm. In a further  
15 embodiment, the width of the conductive structures is preferably between about 1.5-2.5 mm. In a still further embodiment, the film or shim from which the conductive structures are formed preferably has a thickness of between about 40 and 70 microns, more preferably about 50 microns.

20 In one embodiment of this aspect, the electrically conductive structures can be formed using one of the methods according to the first aspect of the invention.

According to yet another aspect, the present invention is an electrically conducting feedthrough comprising:

25 a relatively electrically insulating member having a first face and at least a second face; and

at least one electrically conductive member extending through at least a portion of the electrically insulative member from the first face to the second face;

wherein said at least one conductive member is non-linear between said first  
30 face and said second face.

According to yet a further aspect, the present invention is an electrically conducting feedthrough comprising:

a relatively electrically insulative member having a first face and at least a  
35 second face; and

at least one relatively electrically conductive member extending through at least a portion of the electrically insulative member from the first face to the second face;

wherein said at least one conductive member has a length between said first face and second face that is greater than the shortest distance between said first face and said  
5 second face.

According to a still further aspect, the present invention is an electrically conducting feedthrough comprising:

a relatively electrically insulative member having a first face and at least a  
10 second face; and

at least one relatively electrically conductive member having an outer surface and extending through at least a portion of the electrically insulative member from the first face to the second face;

wherein at least a portion of the outer surface of said at least one conductive  
15 member is non-linear between said first face and said second face.

According to yet another aspect, the present invention is an electrically conducting feedthrough comprising:

a relatively electrically insulative member having a first face and at least a  
20 second face; and

at least one relatively electrically conductive member having an outer surface and extending through at least a portion of the electrically insulative member from the first face to the second face;

wherein at least a portion of the outer surface of said at least one conductive  
25 member defines an interface path between the conductive element and the insulating material that is greater than the shortest distance between said first face and said second face.

In one embodiment, the first face and second face of the insulating member can  
30 face outwardly in opposite directions. In one embodiment, the first and second faces can be substantially parallel or parallel. The first face is preferably the outer face of the feedthrough and the second face is preferably the inner face of the feedthrough.

In one embodiment, the feedthrough preferably has a plurality of electrically  
35 conductive members extending through the insulative member from said first face to said second face. In one embodiment, each of the conductive members has the same

configuration. In another embodiment, only some of the conductive members may have the same configuration while one or others have a different configuration.

5 In a further embodiment, said one or more conductive members can undergo a first change of direction between the first face and the second face of the insulative member. In another embodiment, said one or more conductive members can undergo two or more changes of direction between the first face and the second face of the insulative member.

10 In yet another embodiment, said one or more conductive members undergo a change of direction in a nominal plane extending at an angle, such as a right angle, to one or both faces of the insulative member. In another embodiment, said one or more conductive members can undergo a change of direction into a direction out of a nominal plane extending at an angle, such as a right angle, to one or both faces of the  
15 insulative member. The conductive member can undergo more than one change of direction out of said nominal plane.

Each change of direction can be at a right angle to the preceding direction of the conductive member. In another embodiment, the change of direction can be at a  
20 different angle than a right angle to that of the preceding direction.

In another embodiment, the change of direction can be abrupt. In another embodiment, the change of direction can be smoothly curved. In another embodiment, a particular conductive member can undergo a combination of abrupt and/or smoothly  
25 curved changes of direction.

In yet another embodiment, said one or more conductive members can have a shape of varying cross-section over the length thereof. In this regard, the conductive members may extend linearly or non-linearly through the insulative member, however,  
30 the interface path between the conductive members and the insulative member is maximised, thereby reducing the effective leakage pathway of the feedthrough device. The conductive members may have a stepped shape providing a zig-zag interface pathway or may have a screw-thread shape providing an equally extended interface pathway.

35

According to another aspect, the present invention is an electrically conducting feedthrough comprising:

a relatively electrically insulating member having a first face and at least a second face; and

5 a plurality of electrically conductive members each having a first end and a second end and extending through at least a portion of the insulative member from said first end at or adjacent the first face to said second end at or adjacent the second face of the insulative member;

wherein the configuration of the first ends of the conductive members at or adjacent the first face of the insulative member is different to the configuration of the second ends of the conductive members at or adjacent the second face of the insulative member.

15 In this aspect, the respective configurations of the first ends and the second ends of the conductive members can be such that the number of first ends of the conductive members per a defined unit area at or adjacent the first face of the insulative member is different to the number of second ends of the conductive members per said defined unit area at or adjacent the second face of the insulative member.

20 In one embodiment, the number of first ends per defined unit area can be greater than the number of second ends per said defined unit area. In another embodiment, the number of first ends per defined unit area can be less than the number of second ends per said defined unit area.

25 In this embodiment, the defined unit area can be  $1\text{mm}^2$ ,  $1\text{cm}^2$ , or some other area.

Still further, the respective configurations of the first ends and the second ends of the conductive members can be such that the spacing between the first ends of the conductive members at or adjacent the first face of the insulative member is different to the spacing between the second ends of the conductive members at or adjacent the second face of the insulative member.

35 In this embodiment, the spacing between the first ends of the conductive members can be greater than the spacing between the second ends of the conductive members. In another embodiment, the spacing between the first ends of the conductive



members can be less than the spacing between the second ends of the conductive members.

5 In each of these aspects, the feedthrough can comprise two or more groups of said plurality of electrically conductive members. Each conductive member in a group can be identical in configuration to the other conductive members in a group. In another embodiment, at least one conductive member in a group can be different in configuration to one or all of the other conductive members in that group. In another  
10 embodiment, the conductive members of one group can be different in configuration to one or more of the conductive members of another group of the feedthrough. Still further, the conductive members of one group can be identical in configuration to one or more of the conductive members of another group of the feedthrough.

15 In one embodiment, each feedthrough comprises two, three or more groups of conductive members. Each group can comprise a series of conductive members in side-by-side relationship. This embodiment offers the capability of the feedthrough having a plurality of layers of conductive members. Such layers of conductive members can be off-set from adjacent layers.

20 In yet another embodiment, the respective dimensions and shape of the first ends and second ends of the conductive members can be such that their shape and dimensions can differ between the first ends at or adjacent the first face of the insulative member and the second ends at or adjacent the second face of the insulative member. Equally, the shape and dimensions of the first and second ends of the  
25 conductive members can also differ from the shape and dimensions of the conductive member embedded within the insulative member.

In this embodiment, the shape and dimensions of the first ends of the conductive members can be such as to allow the ends to communicate directly with an integrated  
30 chip design whilst the shape and dimensions of the second ends of the conductive members can be such as to allow the ends to communicate with wires or leads connected to a stimulating electrode or the like. In this regard, the size and shape of the first and second ends of the conductive members can be determined prior to the manufacture of the feedthrough device.

In these aspects, the relatively electrically insulative material is preferably a ceramic material or hermetic glass material, suitable for use in a feedthrough application.

5 Still further, the hermeticity of the interface between each of the interfaces between the respective electrically conductive structures and the relative insulative body or the degree of permeation of fluid between the conductive structure and the insulative body is preferably defined by the following relationship:

10 
$$H = f(L, 1/A, 1/t) \quad (1)$$

where

L is the length of the electrically conductive element extending from a first face to a second face of the insulative body;

15 A is the cross-sectional area of the electrically conductive element; and  
t is the time that the interface is exposed to the fluid, including bodily fluids.

It will be appreciated that the cross-sectional area A is related to a measurement  
20 of the perimeter of the electrically conductive element. That is, the smaller the size of the interface between the conductive insert and the insulative material, the greater the degree of hermeticity of the feedthrough.

In one embodiment, the feedthrough can be brazed into the wall of an electrical  
25 device, such as an implantable stimulator unit of a medical implant device. In a preferred embodiment, the feedthrough can be adapted to be used with a cochlear implant hearing prosthesis to provide electrical conduction between the circuitry within an implantable stimulator unit and the intracochlear or extracochlear electrodes and/or the implantable receiver coil.

30 Each feedthrough preferably has sufficient conductive members embedded therein to ensure there are sufficient connectors to suit the desired application. In a cochlear implant application, the feedthrough would preferably have sufficient conductive members embedded therein to ensure that there are sufficient connectors for  
35 each of the electrode channels of the intracochlear electrode array, one or more extracochlear electrodes, and the inputs from the receiver coil.

The present invention provides a method of forming a feedthrough for an implantable component comprising a relatively electrically insulative member having a plurality of relatively electrically conductive members extending therethrough. The method ensures the electrically conductive members are hermetically encased within the insulating material in a way that allows electrical connection through the feedthrough while preventing transfer of bodily fluids from outside the component into the interior of the component, as well as preventing the transfer of potentially dangerous materials from internal of the component to the surrounding tissue and body fluids.

The present invention also provides the capability of using smaller sized conductive components, having a smaller perimeter of the cross section, thereby providing increased hermeticity. It is therefore possible to utilise the present invention to create feedthrough devices that are of similar dimensions to prior art feedthrough devices but which have far superior hermeticity properties. Equally, the present invention can be utilised to create feedthrough devices which are of much smaller dimensions than existing feedthrough devices having similar and improved hermeticity than is currently the case.

The present invention also provides the ability to create a feedthrough device having a relatively denser array of conductive structures than prior art devices, as the conductive components can be spaced closer together than is achievable in traditional devices.

According to a further aspect, the present invention is a method of forming an insulative member of a feedthrough device comprising the step of moulding the member in a mould having a plurality of pins extending therethrough.

In this embodiment, the mould can have a desired number of pins, for example 28, in one plate of the mould and a corresponding number of cavities, accommodating the pins, in the opposite plate of the mould. In use, the mould is filled with hot feedstock and in order to prevent the pressure of the injection from bending the pins and to minimize impact during injection, the mould is only partially opened when the initial quantity of the feedstock is injected. As the mould cavity is only partially opened, only a very short portion of the pins are exposed to the pressure. The mould is

then slowly opened while injection continues, so that at any given time only a very short portion of the pins are exposed unsupported to the injection of the feedstock. Eventually, the entire cavity of the mould is filled while the position of the pins is preserved. Once the moulding step is concluded, the moulded part can be ejected from  
5 the mould, leaving behind the mould with its elongate pins in place.

The moulded part ejected from the mould is left with a plurality of holes therein formed by the presence of the pins in the mould. The holes can be about 175µm in diameter.

10

The moulded part can then undergo further processing. For example, platinum pins can be inserted into the holes of the moulded part before the entire assembly undergoes a water de-binding step, which includes washing of the moulded part over several hours at an elevated temperature, eg. 40°C. The assembly can then undergo  
15 thermal de-binding at approximately 300°C over a period of approximately 24 hours. Finally, the assembly can be sintered at around 1600°C thereby forming a final assembly that has a series of platinum pins extending therethrough.

In another aspect, the present invention is a method of forming an insulative  
20 member of a feedthrough device comprising the steps of:

forming a sacrificial component having a plurality of elongate structures;

coating at least a portion of the elongate structures with a relatively electrically insulating material; and

sacrificing the sacrificial component so leaving an electrically insulating  
25 material having a plurality of holes therein at what was the location of the elongate structures.

In this aspect, the sacrificial component can have a shape similar to or identical to that depicted in Figs. 1, 14, 15, 16, 17 and 20. Other shapes, such as annular  
30 arrangements of elongate structures can be envisaged. In this embodiment, however, the entire component is adapted to be sacrificed so leaving a formed insulative member having a plurality of holes extending therethrough corresponding to the position of the elongate members of the sacrificed component.

35 In one embodiment, the sacrificial component can comprise a metal or polymer having a melting point less than that of the insulative member formed therearound.

Once the insulative member is formed, the temperature of the member can be increased until such time as the metal or polymer of the sacrificial component melts and is drained or drawn away from the insulative member. In this regard, it will be appreciated that the insulative member could be formed using an annular sacrificial  
5 component that is melted away so leaving the member with its holes formed in the location of the now melted sacrificial component.

#### Brief Description of the Drawings

10 By way of example only, preferred embodiments of the invention are now described with reference to the accompanying drawings, in which:

Fig. 1 is a perspective view of one embodiment of an electrically conductive structure for use in the method according to the present invention;

15

Fig. 2 is a perspective view of the conductive structure of Fig. 1 overmoulded with an insulative ceramic member;

Fig. 3 is a perspective view of the feedthrough formed from the conductive  
20 structure of Fig. 1;

Fig. 4a is a perspective view of an insulative ceramic disc having a saw-tooth outer surface for use in the formation of another embodiment of a conductive structure according to the present invention;

25

Fig. 4b is a perspective view of the ceramic disc of Fig. 4a with a conductive platinum wire coiled around the disc;

Fig. 5 is a perspective view of the disc of Fig. 4b with an overmould of ceramic  
30 material around the outer surface of the disc;

Fig. 6 is a feedthrough formed from the conductive structure of Fig. 4a;

Fig. 7 is a perspective view of a platinum sheet with elongate members  
35 extending out of the plane thereof for use as a conductive structure in another embodiment of a method according to the present invention;

Figs. 8a and 8b are perspective views of the sheet of Fig. 7 with a layer of ceramic moulded thereto;

5 Fig. 9 is a perspective view of a feedthrough formed using the sheet of Fig. 7;

Figs. 10a-10e are perspective views of a still further embodiment for forming a feedthrough using the method according to the present invention;

10 Fig. 11 is a simplified flow chart of the steps of one embodiment of the method according to the present invention.

Figs 12a is a side view of a stack of platinum sheets about to be machined into an electrically conducting feedthrough according to the present invention;

15

Fig. 12b is a top view of a platinum sheet highlighting the region of platinum to be removed in the process depicted in Fig. 12a;

Fig. 12c is a top view of machined sheet of platinum formed using the process depicted in Fig. 12a;

20

Figs. 13a-13d depict another possible technique for forming a feedthrough according to the present invention;

25 Fig. 14 is a plan view of another embodiment of an electrically conductive structure for use in the method according to the present invention;

Fig. 15 is an enlarged plan view of a single conductive member of another embodiment of a conductive structure according to the present invention;

30

Fig. 16 is an enlarged plan view of a single conductive member of another embodiment of a conductive structure according to the present invention;

Fig. 17 is an enlarged view of a single conductive member of another embodiment of a conductive structure according to the present invention;

35

Fig. 18 is a cross-sectional view of two different conductive structures of a feedthrough according to the present invention wherein the interface between the conductive structures and the insulative material is non-linear;

5 Fig. 19 is an enlarged view of one of the interfaces of Fig. 18;

Fig. 20 is a plan view of yet another embodiment of an electrically conductive structure for use in the manufacture of a feedthrough according to the present invention;

10

Fig. 21 is a plan view of the electrically conductive structure of Fig. 20 embedded within a ceramic member with its transverse support members removed;

15 Fig. 22 is a sectional view of another embodiment of a feedthrough having three groups of conductive members;

Fig. 23 is a sectional view of another embodiment of a feedthrough according to the present invention;

20 Fig. 24 is a sectional view of a still further embodiment of a feedthrough according to the present invention;

Fig. 25 is a further part-sectional, part front view of the feedthrough of Fig. 24; and

25

Fig. 26 is a perspective of another embodiment of an insulative member according to the present invention.

#### Preferred Mode of Carrying out the Invention

30

The steps of one embodiment of a method of forming an electrically conducting feedthrough according to the present invention are depicted in Fig. 11.

35 The method 10 comprises a first step 11 of forming an electrically conductive structure comprising a sacrificial component and non-sacrificial component. Different examples of such structures are depicted in Figs. 1, 4b, 7, and 10b.

The method further comprises a step 12 of coating or moulding a non-electrically conductive insulative member on to at least a portion of the non-sacrificial component and not on to at least a portion of the sacrificial component of the  
5 conductive structure.

Still further, the method comprises a step 13 of then removing at least that portion of the sacrificial component of the conductive structure on to which the insulative member has not been coated or moulded.

10

Following removal of the sacrificial component of the conductive structure, the green body of the insulator can undergo a step of debinding 14 prior to a step of sintering 15. Once sintered, the ceramic feedthrough with the conductive members extending therethrough is ready for appropriate mounting in the wall of an implantable stimulator unit of a cochlear implant hearing prosthesis or other appropriate device.

The above sequence of steps are generally governed by the properties of the insulative member being employed, for example, ceramic shrinks when sintered. In this regard, it may be possible to vary the sequence of the steps so that removal of at  
20 least a portion of the sacrificial component occurs after de-binding or sintering of the ceramic.

As depicted in Fig. 1, the electrically conductive structure formed in step 11 can be formed from a film or shim 21 of biocompatible platinum. Other suitable  
25 electrically conductive metals or metal alloys are also envisaged.

As depicted in Fig. 1, the film or shim 21 of platinum can be formed into a shape comprising the sacrificial component and the non-sacrificial component of the electrically conductive structure. In this embodiment, the electrically conductive  
30 structure comprises a plurality of separated elongate linear members 22 extending between respective parallel transverse support members 23,24.

The separation of the elongate members 22 is such that the insulative material when moulded around the members 22 can also move between the members 22 and so  
35 prevent electrical conduction between the respective members 22 at completion of the method 10.



In the depicted embodiment, the shape of the electrically conductive structure 21 is formed by punching the shape, using a suitable shaped and dimensioned punching tool, from a film of platinum. It is envisaged that this shape could be created by a  
5 variety of material removal methods, such as electrical discharge machining (EDM), micro-knifing and/or laser cutting.

Figures 12a, 12b and 12c depict one method of forming the electrically conductive structure according to a preferred embodiment. In this method, wire cutting  
10 is utilised. This method employs the principles of EDM methods to remove the unwanted material, however, in this instance the spark is created between the work-piece 60 being machined, for example a stack of platinum films 62, and a continuously moving wire 64, with the components immersed in a dielectric medium (not shown).

Figure 12a is a side view of this method and shows a number of foils of conductive material 62 stacked together to form a work-piece 60, with the foils preferably being clamped together and immersed into a dielectric medium. The foils can be platinum or iridium or any other suitable conductive material. The wire 64 is then fitted through the work-piece 60 by creating an appropriate aperture through the  
20 work-piece 60. A series of electrical discharges are then generated between the wire 64 and the work-piece 60 in the dielectric medium, causing erosion of the films 62 to occur in a desired pattern. Typically, the wire 64 is drawn through the work-piece 60 in a continuous feeding motion, for example in a downward motion shown by arrow A, however, the position of the wire 64 with respect to the work-piece 60 can remain  
25 stationary, while the work-piece 60 is moved in the desired directions to created the desired pattern.

As is shown in Figure 12b, the hashed regions 66 are removed from each of the foils of conductive material in the work-piece 60. This then leaves a conductive film as  
30 depicted in Figure 12c as the cross-hashed region 68, which is substantially the same as that shown and described with reference to Figure 1.

It is also envisaged that the electrically conductive structures as depicted in the drawings can be formed by metal injection moulding (MIM). Like PIM described  
35 above for forming the electrically insulative layer, MIM uses metal powder instead of ceramic powder as in PIM, to create feedstock. In MIM, the structure is moulded and

then undergoes de-binding and sintering to form the final structure. Such a method of forming the structure may be particularly useful in forming structures with complex three-dimensional shapes, such as those described below. MIM may also be particularly useful in forming structures having various cross-sectional shapes. In this regard, MIM techniques can form structures having different profiles and smoother finishes than can currently be achieved with the above mentioned material removal methods.

As depicted in Fig. 2, at least a portion of each of the elongate members 22 extending between the support members 23,24 are coated or overmoulded with an insulative material 25 described in more detail below.

In the depicted embodiment, the step of moulding the insulative material 25 around the electrically conductive structure (step 12) comprises a step of mounting or clamping the conductive structure in a mould and then moulding the insulative material on and/or around the conductive structure.

In a preferred embodiment, the mould can comprise an injection mould. In one embodiment, step 12 can comprise a step of using powder injection moulding (PIM) to mould the insulative material around the desired portion of the conductive structure. In a preferred embodiment of this moulding process, fine ceramic powder is mixed with a binder and homogenised to create a feedstock for the injection mould. The presence of the binder serves to make the feedstock sufficiently fluid to be used in an injection moulding process. Once moulded, the insulative ceramic can be allowed to at least partially set and form a green body.

Once the green body is formed, the sacrificial component of the electrically conductive structure can be removed. In the embodiment depicted in Figs. 1 to 3, the sacrificial component can be removed by laser cutting. Other suitable material removal techniques, such as cutting or abrading techniques are also envisaged.

In the embodiment depicted in Figs. 1 to 3, the sacrificial component comprises the transverse members 23,24. Once these are removed, a plurality of respectively electrically insulated elongate members 22 remain extending through the green body

In the embodiment depicted in Figs. 4a and 4b, the step 11 of forming the electrically conductive structure comprises the steps of:

- (a) forming an insulative disc 30 having an outer surface defining a plurality of teeth 31 having notches 32 therebetween; and
- 5 (b) winding a platinum metal wire 33 around the disc 30 such that at least some of the notches 32 have a wire passing therethrough (as is depicted in Fig. 4b).

In the depicted embodiment, the insulative disc can be formed of a ceramic material such as that used in step 12 described above. In another embodiment, a  
10 different material could be used that exhibits the desired insulative properties. The insulative disc 30 preferably has a plurality of equally spaced notches and teeth about its outer periphery.

As depicted in Fig. 4b, each of the notches 32 receive a portion of the wire 33.  
15 In the depicted embodiment, the wire has a diameter of about 25 $\mu$ m.

Once the wire 33 has been passed through each of the notches 32, the insulative disc 30 and surrounding wire can be overmoulded in step 12 with an outer annular coating of a suitable insulative material such as a ceramic 35. This material is  
20 preferably moulded around the disc such that at least those portions of the wire 33 passing around the notches 32 of the disc outer surface are encapsulated in the material 35.

The sacrificial component of the structure depicted in Fig. 5 comprises that part  
25 of the wire not passing through the notches 32. On removal of the remainder of the wire, one is left with an insulative member 35 having a platinum conductive member 36 passing therethrough at each location where a notch 32 existed in the outer surface of the original insulative disc 30.

30 Another method of forming a different conductive structure is depicted in Figs. 7 to 9. In this arrangement, step 11 comprises forming a multi-sided sheet 40 of electrically conductive material, such as platinum, having a plurality of integrally attached elongate members 41 extending outwardly from at least three sides of the periphery thereof. The elongate members extend outwardly and in a direction out of  
35 the plane of the sheet. In the depicted arrangement, the elongate members 41 extend outwardly and upwardly from the sheet.

In this embodiment, a coating of insulative material 42 is firstly moulded to one side of the sheet 40 and elongate members 41.

5 In this embodiment, the sacrificial component preferably comprises the sheet 40 from which each of the elongate members 41 extend. With the sheet and elongate members supported on one side by a layer of insulative material 42, the sheet 40 can be removed from the structure leaving a ring of insulative material with the now separated elongate members 41 supported thereon. Another layer of insulative material 43 can  
10 then be moulded between and around the ring thereby forming an insulative member having the elongate members extending therethrough from one face to the other. The result is a plurality of respectively electrically insulated elongate members 41 embedded within a ceramic green body comprised of layers 42 and 43.

15 In another embodiment depicted in Figs. 10a-10e, the step of forming the electrically conductive structure can comprise a step of spirally coiling an electrically conductive wire 52, such as platinum wire, along at least a portion of a length of a thread of a screw 51. Once positioned, a layer of insulative material 53 can be moulded around the thread 51 and the wire 52. Once the insulative material 53 has cured, the  
20 screw 51 can be withdrawn from the insulative ceramic material so leaving the coiled wire 52 embedded within the inner surface of the insulator layer 53 (see Fig. 10c). The orifice left by the withdrawal of the screw 51 can be filled with insulative material 54. In this embodiment, the sacrificial component preferably comprises adjacent portions of respective turns of the coiled wire 52, so leaving wire portions 55 embedded within  
25 an insulative member as depicted in Fig. 10e.

Figs 13a-13b depict a still further embodiment of a method for forming a feedthrough according to the present invention. In this embodiment, a series of platinum conductive members 71 are formed on a copper backing 72 (Fig. 13a). A first  
30 layer of ceramic 73 can then be moulded thereto (Fig. 13b) before the copper backing is etched away (Fig. 13c). An overmould of ceramic 74 is then provided (see Fig. 13d) to form the completed feedthrough.

Fig. 14 depicts another type of electrically conductive structure that can be used  
35 in the manufacture of a feedthrough according to the present invention. The depicted

electrically conductive structure is again formed from a film or shim 21 of biocompatible platinum.

In Fig. 14, the film or shim 21 of platinum is formed into a shape comprising a sacrificial component and a non-sacrificial component. In this embodiment, the electrically conductive structure comprises a plurality of separated non-linear members 22a extending between respective parallel transverse support members 23a, 24a.

The separation of the non-linear members 22a is such that the insulative member (such as a ceramic) when moulded around the members 22a can also move between the members 22a and so prevent electrical conduction between the respective non-linear members 22a at completion of the method 10.

In the depicted embodiment, the shape of the electrically conductive structure 21 is formed by punching the shape, using a suitable shaped and dimensioned punching tool, from a film of platinum. It is envisaged that this shape could also be formed by a variety of material removal methods, such as electrical discharge machining (EDM), micro-knifing and/or laser cutting.

Fig. 14 depicts the non-linear members 22a as having two relatively abrupt right angle changes of direction at corners 125 and 126. Alternative elongate but non-linear conductive members 22a are depicted in Figs. 15, 16, and 17.

In Fig. 15, the non-linear member 22a undergoes two changes in directions at corners 125a and 126a. In this embodiment, the changes in direction are relatively smoothly curved. As depicted in Fig. 16, the non-linear member can undergo more than two changes in direction. Other suitable configurations can be envisaged.

In Fig. 17, the conductive member is formed and then twisted into a third dimension before being clamped and then placed in a mould. The insulative member can then be moulded around the spiral conductive member 22a. Again, other configurations of the conductive member extending through the insulative member in a third dimension can be envisaged.

Fig. 18 depicts an alternative embodiment of the present invention. In this embodiment, conductive members 150 are shown extending from one face 151 of an

insulative member 135 to another face 152. In this embodiment, the conductive members 150 are substantially linear however the surfaces of the conductive members 150 are provided with extended material to produce a shape that lengthens the interface path between the conductive material and the insulative material 150. As shown, 5 possible shapes of the conductive members according to this embodiment include having a stepped outer surface or a screw-thread shaped member. The purpose of providing such a shaped conductive member is to substantially increase the leakage pathways of the feedthrough device.

10 In the depicted embodiment, the step of moulding the ceramic 135 around the electrically conductive structure comprises a step of mounting or clamping the conductive structure in a mould and then moulding the ceramic 135 on and/or around the conductive structure.

15 The mould can again comprise an injection mould. In one embodiment, powder injection moulding (PIM) can be used to mould the ceramic around the desired portion of the conductive structure. In this moulding process, fine ceramic powder is mixed with a binder and homogenised to create a feedstock for the injection mould. The presence of the binder serves to make the feedstock sufficiently fluid to be used in an 20 injection moulding process. Once moulded, the ceramic can be allowed to at least partially set and form a green body.

In the embodiment shown in Fig. 19, the effect of such a design on the feedstock properties is shown. In this embodiment, which is an enlargement of the section shown 25 in Fig. 18, the feedstock is designed to flow inside the stepped cavities of the conductive member to form a bond with the surface of the conductive member along the entire length of the conductive member. In this embodiment, the conductive member can have dimensions of  $x$  and  $y$  within the range of 10-50 $\mu$ m. In this range, the feedstock is capable of filling such cavities with standard powder injection 30 moulding techniques to provide a well sealed interface. It is envisaged that with improvements in the capabilities of the feedstock and associated equipment, even smaller cavities will be able to be successfully employed.

Once the green body is formed, the sacrificial component of the electrically 35 conductive structure can be removed. In the depicted embodiment, the sacrificial

component can be removed by laser cutting. Other suitable techniques, such as cutting or abrading techniques, are also envisaged.

In the embodiment depicted in Figs 14-17, the sacrificial component comprises the transverse members 23a, 24a. Once these are removed, a plurality of respectively  
5 electrically insulated non-linear members 22a remain extending through the green body.

Fig. 20 depicts a still further type of electrically conductive structure that can be  
10 used in the manufacture of a feedthrough according to the present invention. The depicted electrically conductive structure is formed from a film or shim 21 of biocompatible platinum. Other suitable electrically conductive metals or metal alloys can be envisaged.

15 In Fig. 20, the film or shim 21 of platinum is formed into a shape comprising a sacrificial component and a non-sacrificial component. In this embodiment, the electrically conductive structure comprises a plurality of separated members 22b extending between respective parallel transverse support members 23b, 24b.

20 The spacing between the conductive members at their connection to transverse member 23b is larger than the spacing between the conductive members where they connect to transverse member 24b.

While Fig. 20 depicts the members 22b as being straight, it will be appreciated  
25 that non-linear members could extend between the respective transverse members 23b, 24b.

The separation of the members 22b is such that the insulative member material when moulded around the members 22b can also move between the members 22b and  
30 so prevent electrical conduction between the respective members 22b.

In the embodiment depicted in Fig. 20, the shape of the electrically conductive structure 21 is formed by punching the shape, using a suitable shaped and dimensioned punching tool, from a film of platinum. It is envisaged that this shape could be created  
35 by a variety of material removal methods, such as electrical discharge machining (EDM), micro-knifing and/or laser cutting.

In the embodiment depicted in Fig. 20, the step of moulding the insulative ceramic member 235 (see Fig. 21) around the electrically conductive structure comprises a step of mounting or clamping the conductive structure in a mould and then  
5 moulding the ceramic on and/or around the conductive structure. The mould can again comprise an injection mould. In one embodiment, powder injection moulding (PIM) can be used to mould the ceramic around the desired portion of the conductive structure. In this moulding process, fine ceramic powder is mixed with a binder and homogenised to create a feedstock for the injection mould. The presence of the binder  
10 serves to make the feedstock sufficiently fluid to be used in an injection moulding process. Once moulded, the ceramic can be allowed to at least partially set and form a green body.

Once the green body is formed, the sacrificial component of the electrically  
15 conductive structure can be removed. In the depicted embodiment, the sacrificial component can be removed by laser cutting. Other suitable cutting or abrading techniques can be envisaged.

In the embodiment depicted in the drawings, the sacrificial component  
20 comprises the transverse members 23b, 24b. Once these are removed, a plurality of respectively electrically insulated members 22b remain extending through the green body 235 as depicted in Fig. 21.

Such a feedthrough as depicted in Fig. 21 can be adapted to be brazed into the  
25 wall of an implantable stimulator unit of a cochlear implant hearing prosthesis. In this regard, the feedthrough can be adapted to provide electrical conduction between the circuitry within the implantable stimulator unit and the intracochlear or extracochlear electrodes, and/or the implantable receiver coil.

30 An advantage of the present invention is that it provides the possibility of allowing exchange of an implantable stimulator unit within a recipient with a newer or replacement model without the necessity to explant the intracochlear electrode array. For example, if a recipient already has an implanted stimulator unit with a cochlear array connected thereto and electrical connection provided by a feedthrough, it is  
35 possible to disconnect the electrode array from the external side of the feedthrough and then remove the stimulator unit. While a newer model stimulator unit may have a



different internal and/or external construction, a feedthrough as here depicted can be provided in the housing of the stimulator unit that is connectable on its external side with the existing configuration of the implanted cochlear array but has a different configuration on its internal side that is compatible with the configuration of the  
5 internal wiring of the stimulator unit.

The conductive members of this feedthrough have a sufficient length and are encased within the insulative member in a way that allows electrical connection through the feedthrough while preventing transfer of bodily fluids from outside the  
10 component into the interior of the component and vice versa.

Fig. 22 depicts a feedthrough that comprises three separate groups of conductive structures 22c disposed in a parallel arrangement. While each group of conductive structures depicted in Fig. 22 is made of a conductive structure, such as is depicted in  
15 Fig. 20, it will be appreciated that the feedthrough could be formed of three conductive structures depicted in Fig. 1 or three conductive structures depicted in Fig. 14. Alternatively, the feedthrough could be formed of one each of the conductive structures depicted in Figs 1, 14 and 20, respectively. Still further, the feedthrough might be formed of two of one structure of either Figs. 1, 14 or 20 and one of the others depicted  
20 in these figures.

As depicted in Fig. 23, the respective groups of conductive structures 22c need not be mounted in a parallel configuration. Again, the respective groups of conductive members 22d can be formed from various combinations of conductive structures as  
25 depicted in Figs. 1, 14 or 20 or other structures within the scope of the invention.

Figs. 24 and 25 depict a further embodiment where the length of the conductive members of each group is different to the length of the members in an adjacent group. The conductive members of a group are also offset from its adjacent groups. While the  
30 groups are in a parallel relationship, it will be appreciated that the groups could be in a non-parallel relationship as depicted in Fig. 23. Each of the conductive members is also depicted as linear and parallel to other members within its group. Again, it can be envisaged that instead, the conductive members may have different configurations, such as is depicted in Figs. 14 or 20. Such configurations make it possible to provide  
35 connections in 3 dimensions, increasing the density of the connecting elements.

In this embodiment, the platinum members 22c are embedded in a surrounding sintered insulative member 335.

Once complete, the insulative member 335 with the platinum members 22c  
5 extending therethrough can be brazed into an orifice in the wall of a unit adapted to receive the feedthrough. Electrical connection can then be made to each end of the respective platinum members as required to form respective electrical conductive paths through the insulative body of the feedthrough.

10 Such a feedthrough can be adapted to be brazed into the wall of an implantable stimulator unit of a cochlear implant hearing prosthesis. In this embodiment, the feedthrough can be adapted to provide electrical conduction between the circuitry within the implantable stimulator unit and the intracochlear or extracochlear electrodes, and/or the implantable receiver coil.

15 Each feedthrough preferably has sufficient platinum members embedded therein to ensure there are sufficient connectors for each of the electrode channels of the intracochlear electrode array, one or more extracochlear electrodes, and the inputs from the receiver coil.

20 Figure 26 depicts yet another embodiment of the present invention, wherein the feedthrough is formed in a similar manner to that described above, particularly in relation to Figs 1-3, however in this embodiment the entire conductive structure is sacrificial, leaving a insulative member 200 having a plurality of holes 201 extending  
25 therethrough.

In this specific embodiment, the insulative body 200 is formed using powder injection moulding and features 28 holes, in predetermined positions, extending  
30 therethrough.

The insulative body 200 is preferably moulded as described previously. However, in this embodiment, the mould features 28 pins in one plate of the mould and a corresponding number of cavities, accommodating the pins, in the opposite plate of the mould. In use, the mould is filled with hot feedstock and in order to prevent the  
35 pressure of the injection from bending the pins and to minimize impact during injection, the mould is only partially opened when the initial quantity of the feedstock

is injected. As the mould cavity is only partially opened, only a very short portion of the pins are exposed to the pressure. The mould is then slowly opened while injection continues, so that at any given time only a very short portion of the pins are exposed unsupported to the injection of the feedstock. Eventually, the entire cavity of the  
5 mould is filled while the position of the pins is preserved. Once the moulding step is concluded, the moulded part 200 is ejected, leaving behind the mould with its elongate pins in place. The moulded part 200 ejected from the mould features the 28 holes 201. Preferably, the holes 201 are only 175  $\mu\text{m}$  in diameter. The moulded part 200 then undergoes further processing.

10

Platinum pins, are firstly inserted into the holes 201 of the moulded part 200 and the entire assembly undergoes a water de-binding step, which includes washing of the moulded part over several hours at 40° C. The assembly then undergoes thermal de-binding at approximately 300°C over a period of approximately 24 hours. Finally, the  
15 assembly is sintered at around 1600°C thereby forming a final assembly that has a series of platinum pins extending therethrough.

Another embodiment of an insulative member having a plurality of holes extending therethrough can be formed using a modified method from that set out in Fig.  
20 11. In this embodiment, the method comprises a step of moulding or coating an electrically insulating material around a structure, such as a structure having a shape similar to or identical to that depicted in Figs. 1, 14, 15, 16, 17 and 20. In this embodiment, however, the entire structure is adapted to be sacrificed so leaving a formed insulative member having a plurality of holes extending therethrough  
25 corresponding to the position of the sacrificed structure.

In one embodiment, the sacrificial structure can comprise a metal or polymer having a melting point less than that of the insulative member formed therearound. Once the insulative member is formed, the temperature of the member can be increased  
30 until such time as the metal or polymer of the sacrificial structure melts and is drained or drawn away from the insulative member. In this regard, it will be appreciated that the insulative member 200 could be formed using an annular sacrificial structure that is melted away so leaving the member 200 with its holes 201 formed in the location of the now melted sacrificial structure.

35

The present invention provides a method of forming a feedthrough for an implantable component comprising an insulative member having a plurality of electrically conductive members extending therethrough. The method ensures the electrically conductive members are encased within the insulative member in a way  
5 that allows electrical connection through the feedthrough while preventing unwanted transfer of materials between the interior of the component and the surrounding environment.

It will be appreciated by persons skilled in the art that numerous variations  
10 and/or modifications may be made to the invention as shown in the specific embodiments without departing from the spirit or scope of the invention as broadly described. The present embodiments are, therefore, to be considered in all respects as illustrative and not restrictive.

## CLAIMS:

1. A method of forming an electrically conducting feedthrough comprising the steps of:
  - 5 (i) forming an electrically conductive structure comprising a sacrificial component and a non-sacrificial component;
  - (ii) coating at least a portion of the non-sacrificial component with a relatively electrically insulating material; and
  - (iii) removing at least a portion of the sacrificial component from the  
10 electrically conductive structure.
2. The method of forming an electrically conducting feedthrough of claim 1 wherein the electrically insulating material is a ceramic material.
- 15 3. The method of forming an electrically conducting feedthrough of claim 1 wherein the electrically insulating material is coated on the non-sacrificial component and not coated on to any portion of the sacrificial component of the conductive structure.
- 20 4. The method of forming an electrically conducting feedthrough of claim 1 wherein the electrically conductive structure is selected from the group comprising a metal, a metal alloy, an electrically conductive ceramic, an electrically conductive composite, and an intrinsically or extrinsically electrically conductive polymer.
- 25 5. The method of forming an electrically conducting feedthrough of claim 4 wherein the electrically conductive structure is formed from a film or shim of platinum.
6. The method of forming an electrically conducting feedthrough of claim 5 wherein the film or shim has a shape comprising two or more conductive elements  
30 extending between respective transverse support members.
7. The method of forming an electrically conducting feedthrough of claim 6 wherein at least one of the conductive elements is linear.
- 35 8. The method of forming an electrically conducting feedthrough of claim 6 wherein at least one of the conductive elements is non-linear.

9. The method of forming an electrically conducting feedthrough of claim 6 wherein at least one of the conductive elements has a length that is greater than the shortest distance between the respective transverse support members.
- 5 10. The method of forming an electrically conducting feedthrough of claim 6 wherein at least one of the conductive elements has a surface that is non-linear.
11. The method of forming an electrically conducting feedthrough of claim 6  
10 wherein at least one of the conductive elements has a surface that defines an interface path between the conductive element and the insulating material that is longer than the shortest distance between the respective transverse support members.
12. The method of forming an electrically conducting feedthrough of claim 1  
15 wherein the shape of the electrically conductive structure is formed in step (i) by punching the shape from a film of electrically conductive material.
13. The method of forming an electrically conducting feedthrough of claim 1  
20 wherein the shape of the electrically conductive structure is formed in step (i) by using electrical discharge machining (EDM) to remove unwanted portions of the film.
14. The method of forming an electrically conducting feedthrough of claim 1 wherein step (i) comprises the steps of:
- (a) forming a relatively electrically insulating disc having an outer periphery  
25 defining a plurality of outwardly extending teeth having notches therebetween; and
- (b) winding an electrically conductive element around the disc such that at least some of the notches have a portion of the conductive element passing therethrough.
- 30 15. The method of forming an electrically conducting feedthrough of claim 14 wherein the electrically insulating disc is formed of a ceramic material.
16. The method of forming an electrically conducting feedthrough of claim 15 wherein the electrically conductive element is a platinum metal wire.

17. The method of forming an electrically conducting feedthrough of claim 1 wherein step (i) comprises a step of forming a film of platinum having a plurality of integrally attached substantially elongate members extending outwardly from at least a portion of the periphery thereof.
- 5 18. The method of forming an electrically conducting feedthrough of claim 17 wherein the elongate members extend outwardly and in a direction out of the plane of the film.
- 10 19. The method of forming an electrically conducting feedthrough of claim 18 wherein at least three sides of the film have elongate members extending at least out of the plane of the film.
20. The method of forming an electrically conducting feedthrough of claim 1  
15 wherein step (i) comprises a step of spirally coiling an electrically conductive metal wire along at least a portion of a length of a screw thread.
21. The method of forming an electrically conducting feedthrough of claim 1 wherein step (ii) comprises a step of mounting or clamping the electrically conductive  
20 structure in a mould and then moulding a coating of the insulating material around the conductive structure.
22. The method of forming an electrically conducting feedthrough of claim 6 wherein the electrically insulating material is moulded around at least a portion of the  
25 conductive elements of the conductive structure.
23. The method of forming an electrically conducting feedthrough of claim 14 wherein the electrically insulating material is moulded around the disc such that at least those portions of the conductive element passing through the notches of the disc are  
30 encapsulated in the insulating material.
24. The method of forming an electrically conducting feedthrough of claim 17 wherein the insulating material is moulded to both sides of the film and elongate members, thereby encapsulating at least a portion of the members in the insulating  
35 material.

25. The method of forming an electrically conducting feedthrough of claim 20 wherein once the wire is positioned around the screw thread, an insulating layer is moulded around the thread and the wire.
- 5 26. The method of forming an electrically conducting feedthrough of claim 25 wherein once the insulating layer has at least partially cured, the screw thread is withdrawn from the insulating material so leaving the coiled wire embedded within the inner surface of the insulating layer, the inner surface defining an orifice.
- 10 27. The method of forming an electrically conducting feedthrough of claim 26 wherein the orifice left by the withdrawal of the screw thread is filled with insulating material.
28. The method of forming an electrically conducting feedthrough of claim 1  
15 wherein step (ii) comprises a step of using powder injection moulding (PIM) to mould the insulating material around said portion of the conductive structure.
29. The method of forming an electrically conducting feedthrough of claim 1 further comprising a step of mounting the feedthrough in an orifice in the wall of a unit  
20 adapted to receive the feedthrough.
30. A feedthrough comprised of one or more relatively electrically conductive structures extending through and embedded within a relatively electrically insulating body when formed using the method of claim 1.
- 25 31. A feedthrough comprised of one or more relatively electrically conductive structures extending through and embedded within a relatively electrically insulating body, wherein the one or more electrically conductive structures are formed from a film or shim of an electrically conductive metal or metal alloy.
- 30 32. The feedthrough of claim 31 wherein the film or shim is formed of platinum.
33. The feedthrough of claim 31 wherein the electrically insulating body is formed of a ceramic.
- 35 34. An electrically conducting feedthrough comprising:



a relatively electrically insulating member having a first face and at least a second face; and

at least one electrically conductive member extending through at least a portion of the electrically insulative member from the first face to the second face;

5 wherein said at least one conductive member is non-linear between said first face and said second face.

35. An electrically conducting feedthrough comprising:

10 a relatively electrically insulative member having a first face and at least a second face; and

at least one relatively electrically conductive member extending through at least a portion of the electrically insulative member from the first face to the second face;

15 wherein said at least one conductive member has a length between said first face and second face that is greater than the shortest distance between said first face and said second face.

36. An electrically conducting feedthrough comprising:

a relatively electrically insulative member having a first face and at least a second face; and

20 at least one relatively electrically conductive member having an outer surface and extending through at least a portion of the electrically insulative member from the first face to the second face;

wherein at least a portion of the outer surface of said at least one conductive member is non-linear between said first face and said second face.

25

37. An electrically conducting feedthrough comprising:

a relatively electrically insulative member having a first face and at least a second face; and

30 at least one relatively electrically conductive member having an outer surface and extending through at least a portion of the electrically insulative member from the first face to the second face;

35 wherein at least a portion of the outer surface of said at least one conductive member defines an interface path between the conductive element and the insulating material that is greater than the shortest distance between said first face and said second face.

38. The electrically conducting feedthrough of any one of claims 34-37 wherein the first face and second face of the insulating member face outwardly in opposite directions.
- 5 39. The electrically conducting feedthrough of claim 38 wherein the first and second faces are at least substantially parallel.
40. An electrically conducting feedthrough comprising:  
a relatively electrically insulating member having a first face and at least a  
10 second face; and  
a plurality of electrically conductive members each having a first end and a second end and extending through at least a portion of the insulative member from said first end at or adjacent the first face to said second end at or adjacent the second face of the insulative member;
- 15 wherein the configuration of the first ends of the conductive members relative to each other at or adjacent the first face of the insulative member is different to the configuration of the second ends of the conductive members relative to each other at or adjacent the second face of the insulative member.
- 20 41. The electrically conducting feedthrough of claim 40 wherein the respective configurations of the first ends and the second ends of the conductive members are such that the number of first ends of the conductive members per a defined unit area at or adjacent the first face of the insulating member is different to the number of second ends of the conductive members per said defined unit area at or adjacent the second  
25 face of the insulating member.
42. The electrically conducting feedthrough of claim 40 wherein the respective configurations of the first ends and the second ends of the conductive members are such that the spacing between the first ends of the conductive members at or adjacent  
30 the first face of the insulating member is different to the spacing between the second ends of the conductive members at or adjacent the second face of the insulating member.
43. The electrically conducting feedthrough of any one of claims 34-37 and 40  
35 wherein the feedthrough comprises two or more groups of said plurality of electrically conductive members.

44. The electrically conducting feedthrough of claim 43 wherein each conductive member in a group is identical in configuration to the other conductive members in a group.
- 5 45. The electrically conducting feedthrough of claim 43 wherein the conductive members of one group are different in configuration to one or more of the conductive members of another group of the feedthrough.
- 10 46. The electrically conducting feedthrough of claim 43 wherein each group comprises a series of conductive members in side-by-side relationship, with said two or more groups layered one on top of the other.
- 15 47. The electrically conducting feedthrough of claim 46 wherein the groups are such that the conductive members of one group are off-set relative to the conductive members of an adjacent group.
48. The electrically conducting feedthrough of claim 40 wherein the dimension and/or shape of the first ends of said conductive members are different from the dimension and/or shape of the second ends of the conductive members.
- 20 49. An implantable device having a housing and further wherein a feedthrough according to any one of claims 34-37 and 40 is mounted in a wall of the housing.
- 25 50. The implantable device of claim 49 wherein the device is a cochlear implant hearing prosthesis and the feedthrough provides electrical conduction between the circuitry within an implantable stimulator unit of said prosthesis and one or more intracochlear or extracochlear electrodes and/or an implantable receiver coil.

1/13

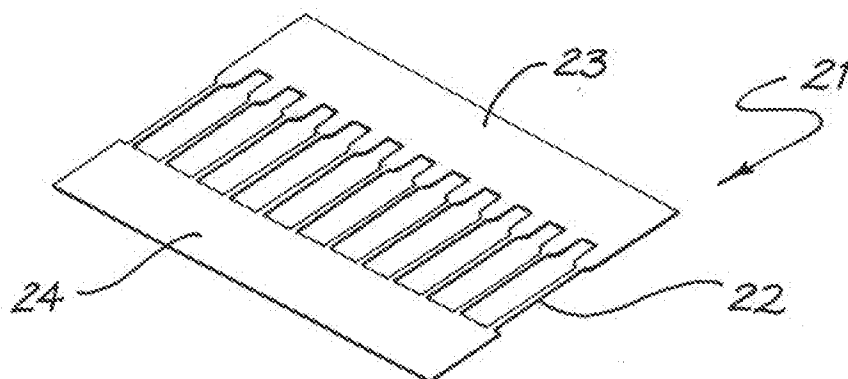


FIG. 1

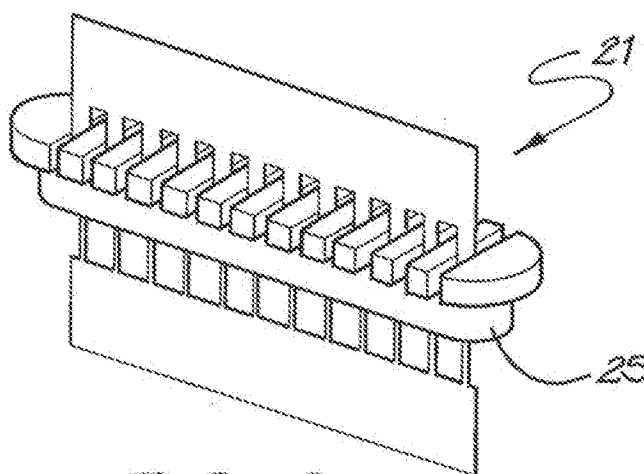


FIG. 2





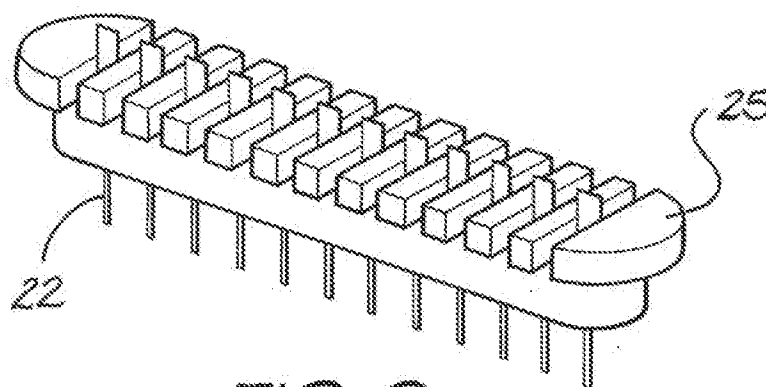


FIG. 3

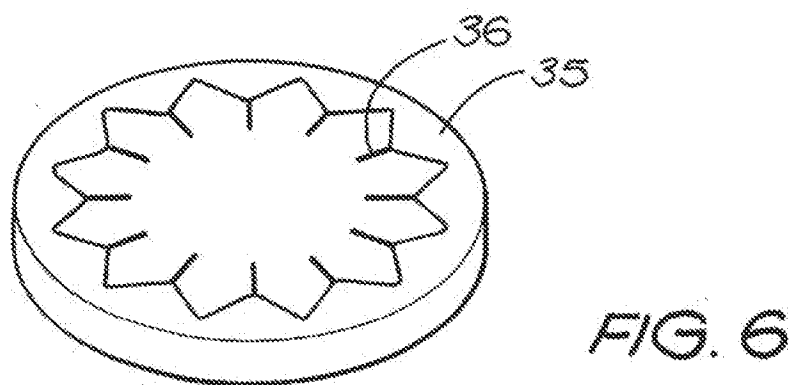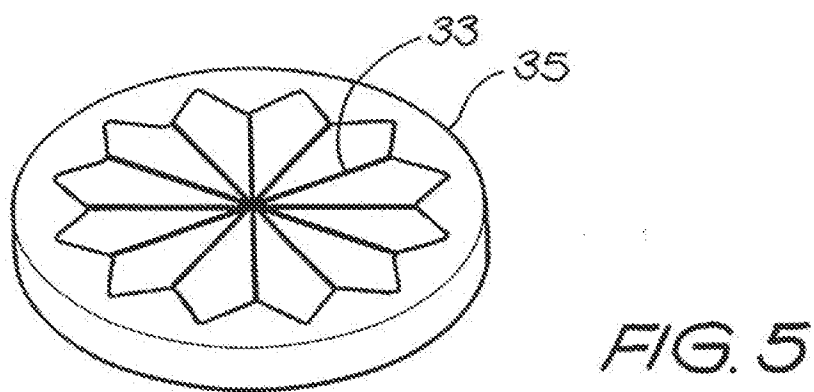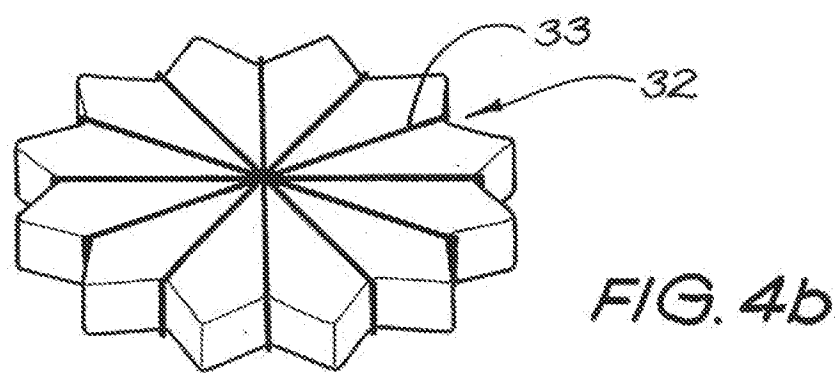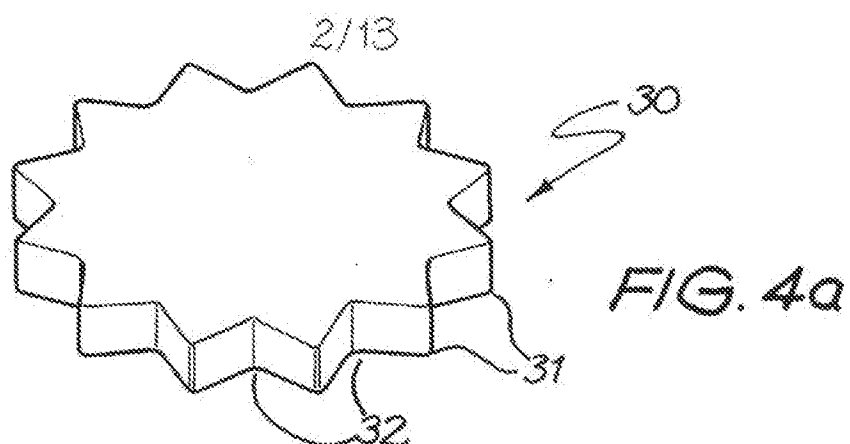

3/13

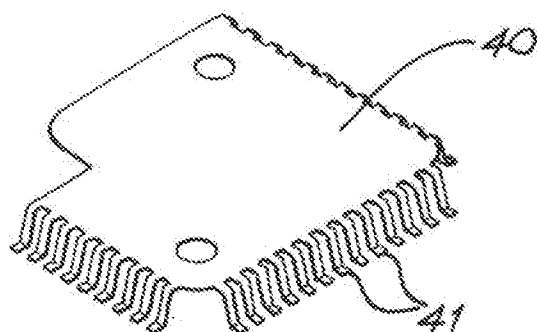


FIG. 7

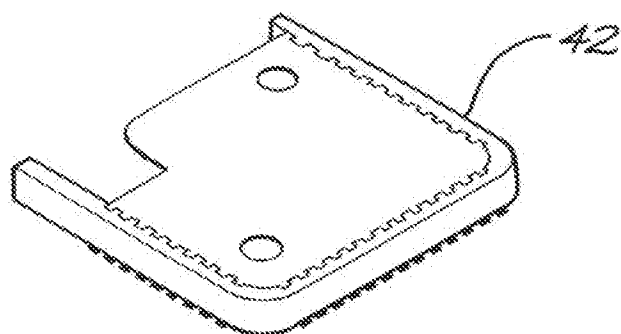


FIG. 8

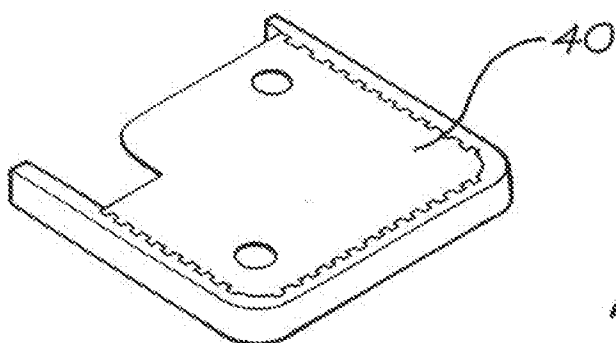


FIG. 8b

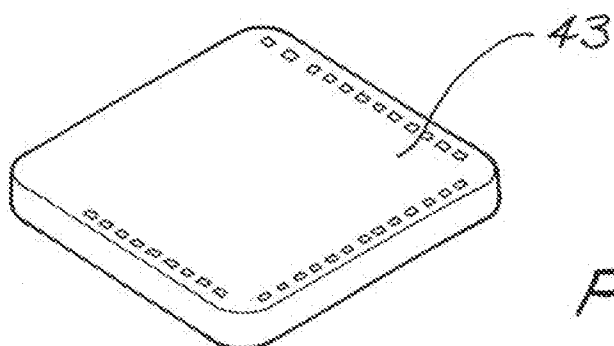


FIG. 9

4/13

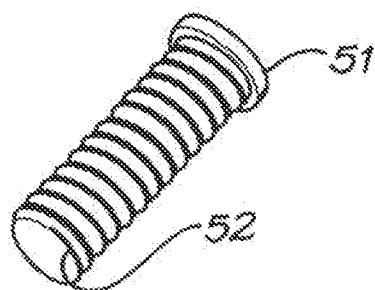


FIG. 10a




FIG. 10b

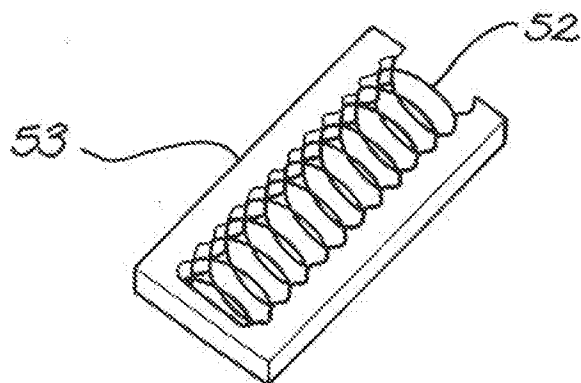


FIG. 10c

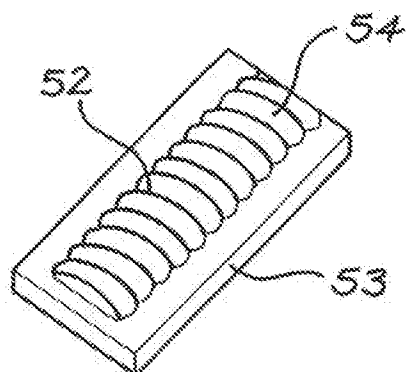


FIG. 10d


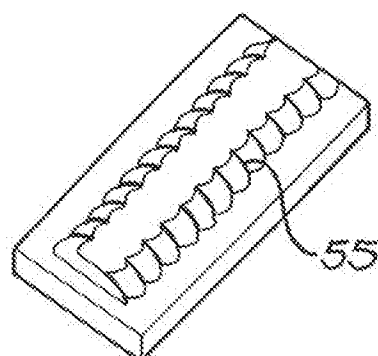





FIG. 10e


5/13

**FIG. 11**

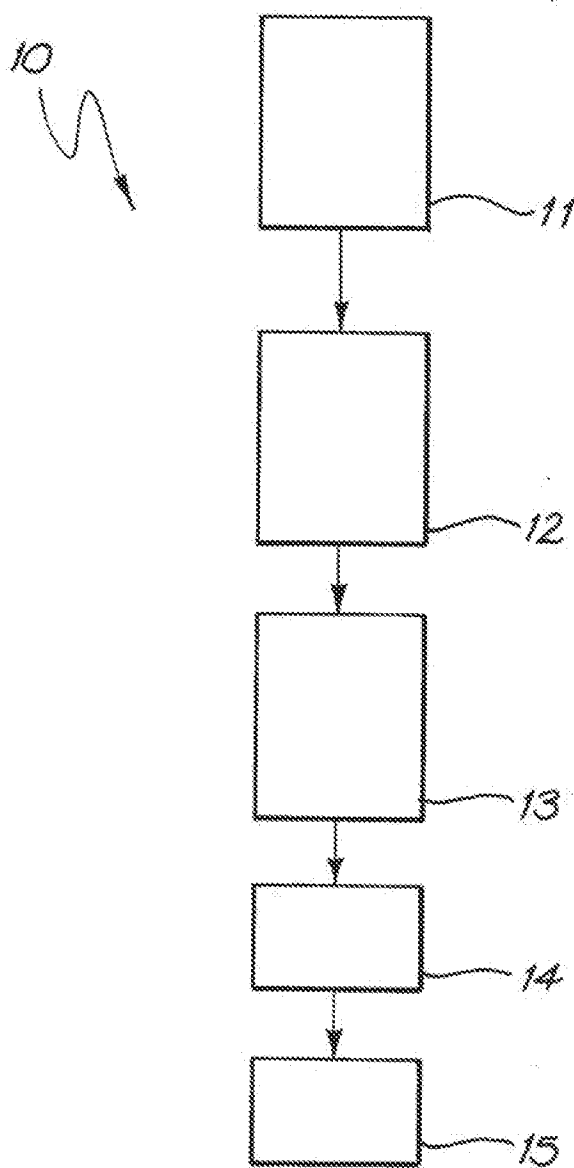


6/13

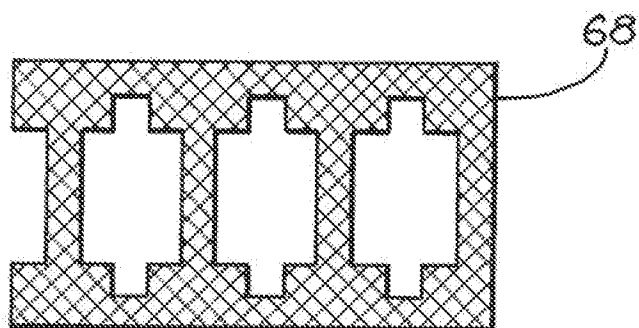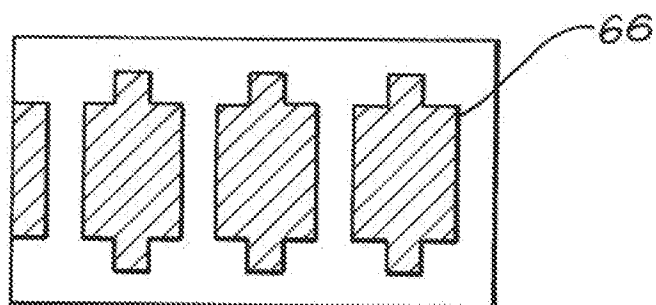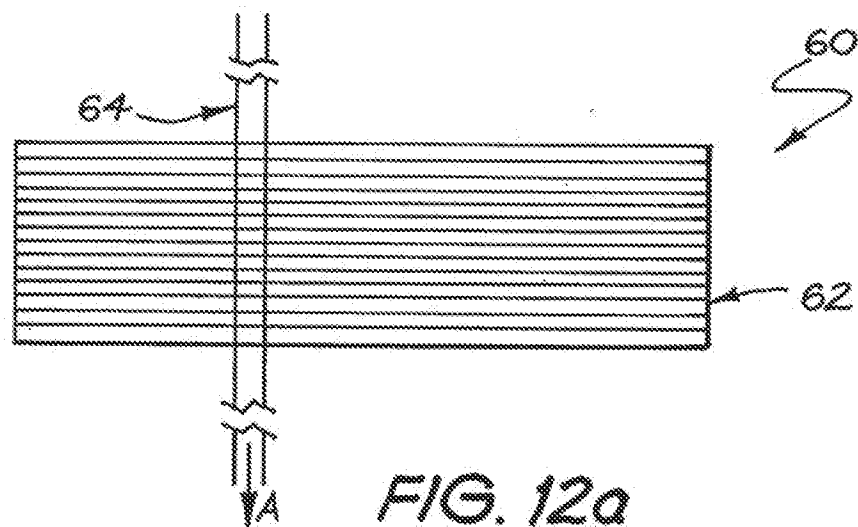


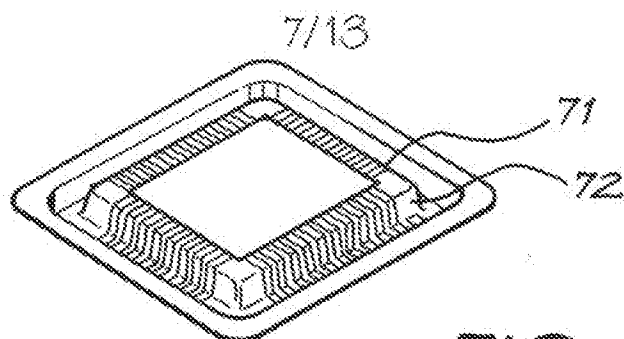


**FIG. 13a**

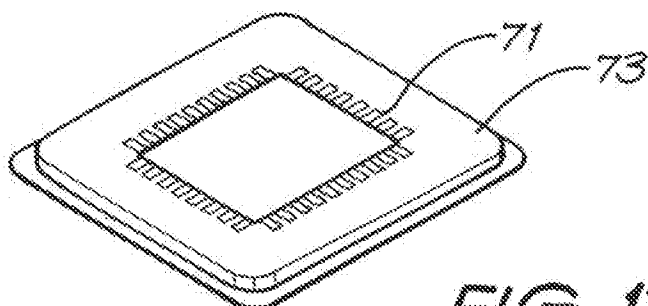

**FIG. 13b**

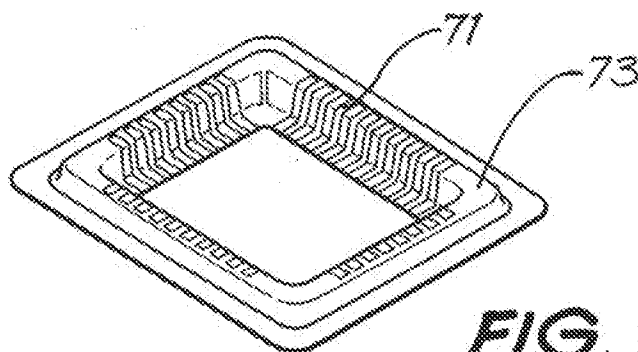

**FIG. 13c**

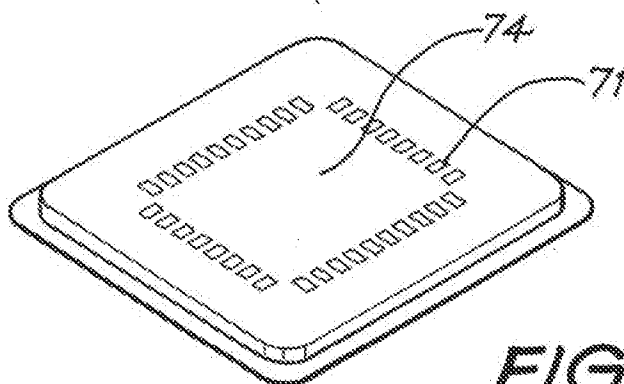

**FIG. 13d**

8/13

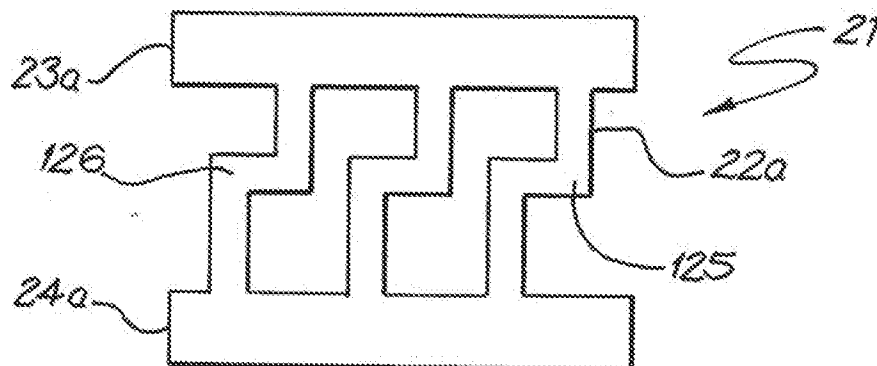


FIG. 14

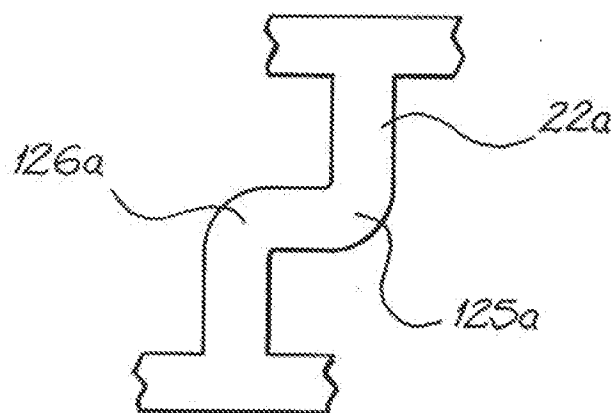


FIG. 15


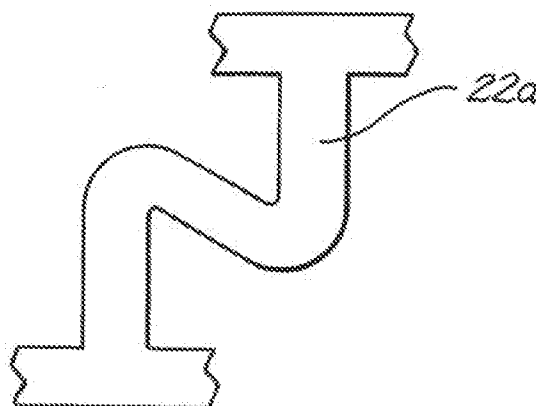




FIG. 16

9/13


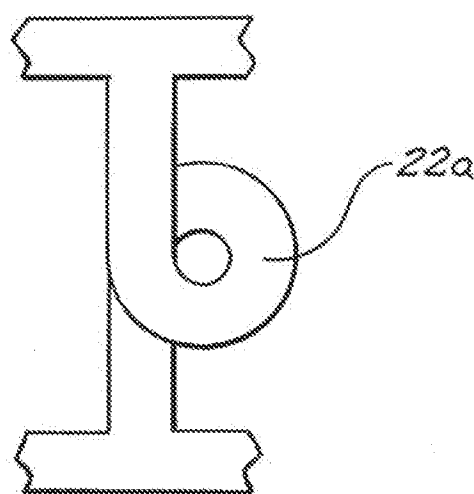






**FIG. 17**

10/13

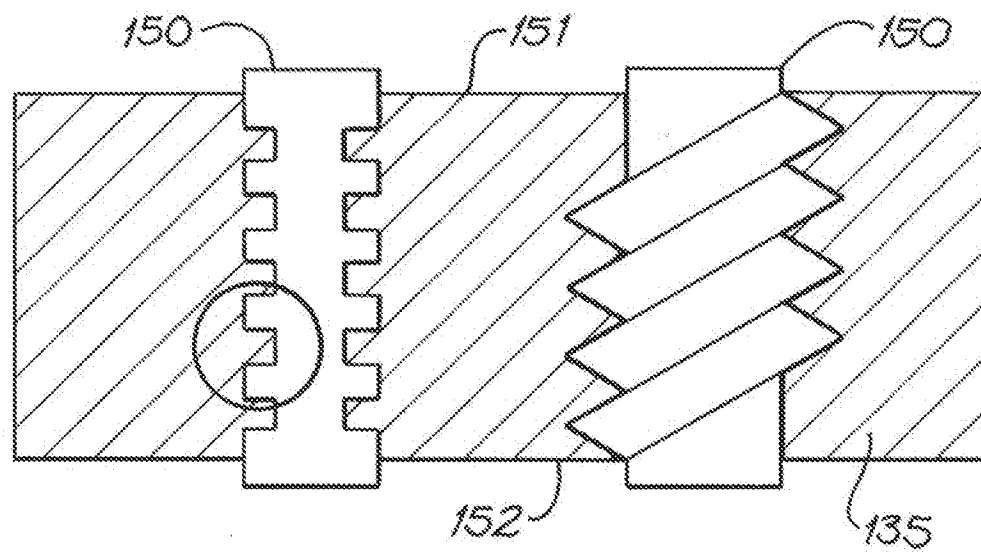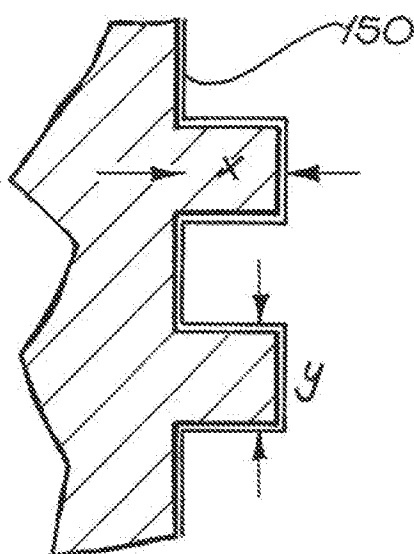**FIG. 18****FIG. 19**

11/13

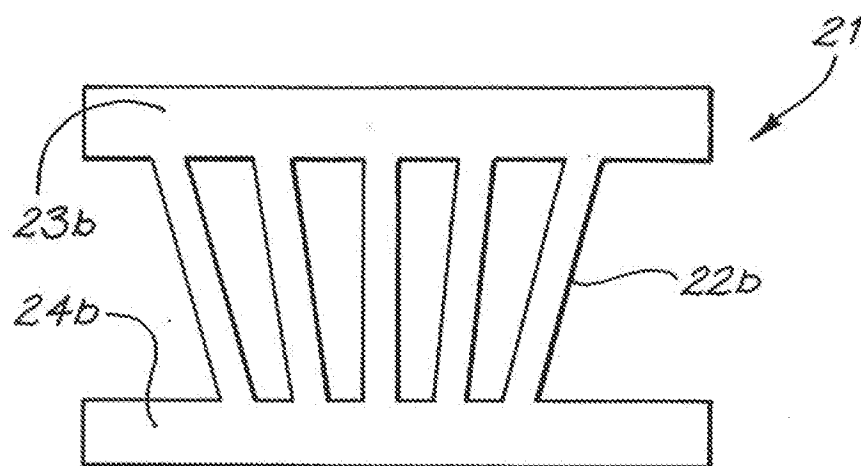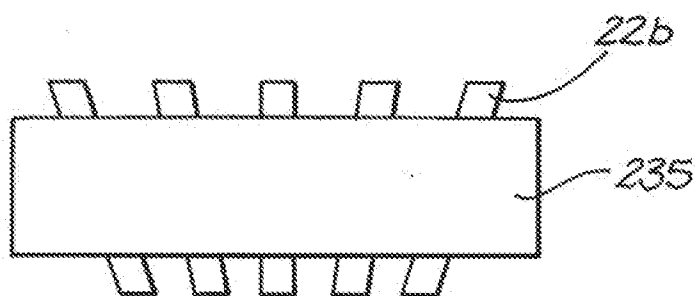*FIG. 20**FIG. 21*

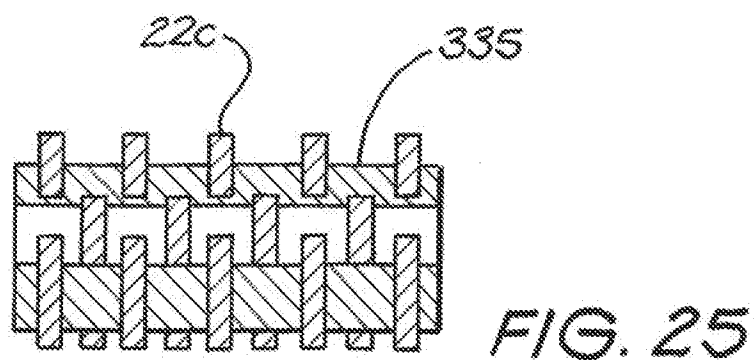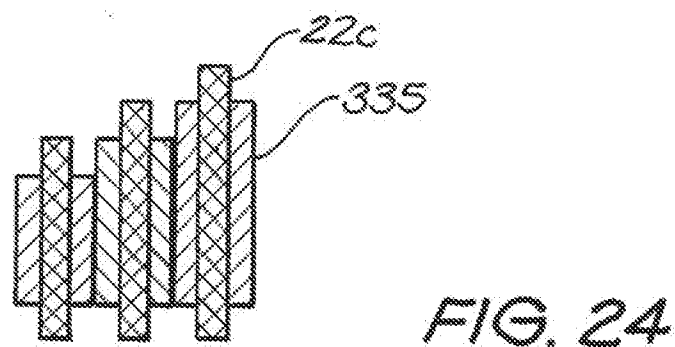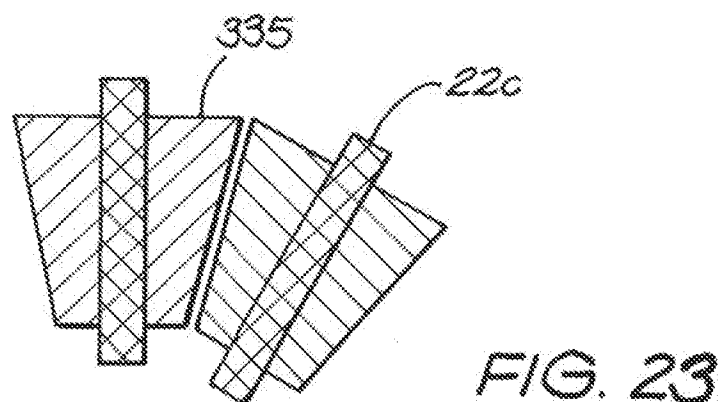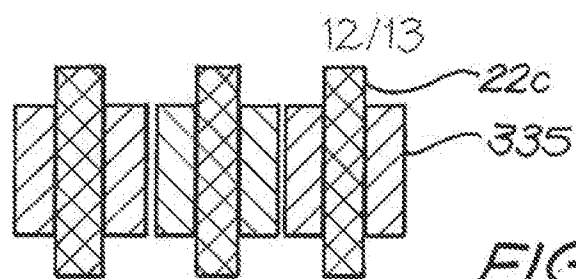

13/13

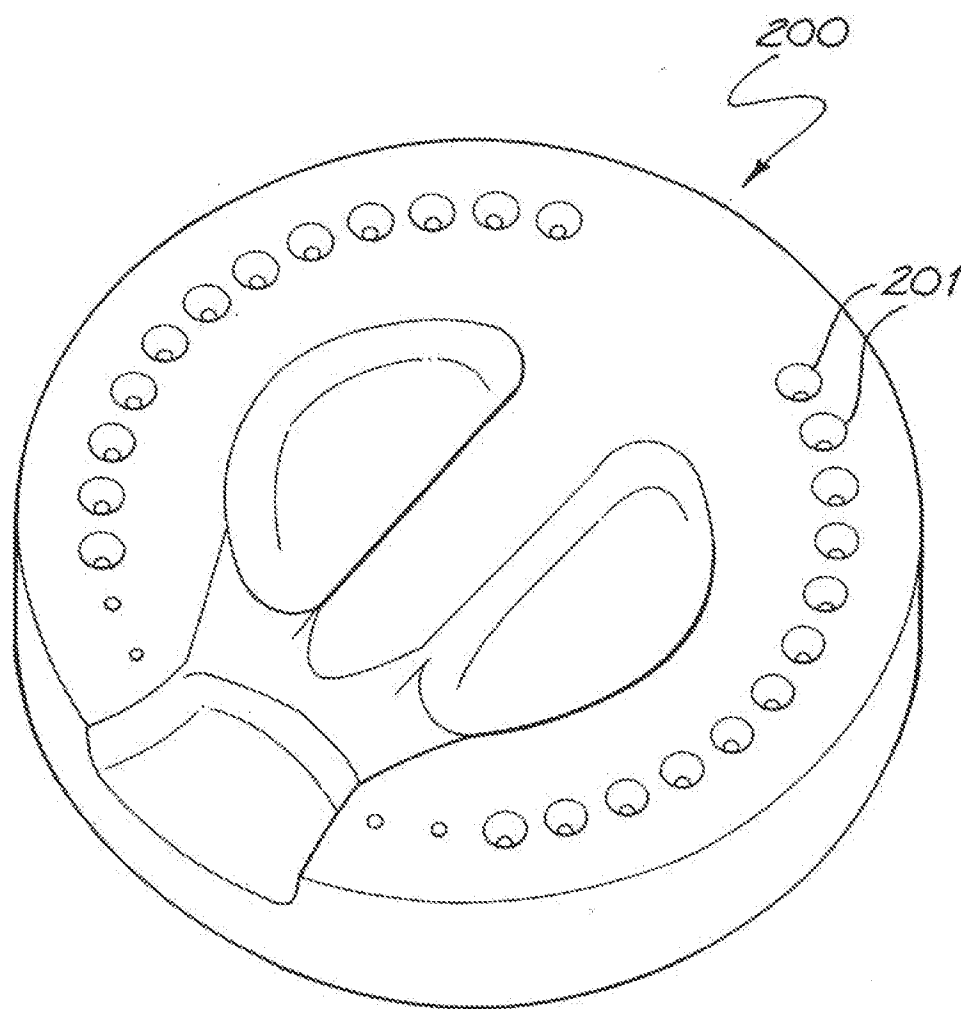


FIG. 26



## INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU93/01288

<b>A. CLASSIFICATION OF SUBJECT MATTER</b>		
Int. Cl. <sup>71</sup> H01R 43/00, A61N 1/05		
According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b>		
Minimum documentation searched (classification system followed by classification symbols)		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) DWPI, IEEE (feedthrough, coat, sacrificial, film, metal)		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 6414835 B1 (WOLF et al.) 2 July 2002 Whole document, especially column 6 lines 47-65, column 8 lines 7-24 Column 10 lines 26-32, 60-65, Figures	31 34,35,36,37, 40
Y	US 6336269 B1 (ELDRIDGE et al.) 8 January 2002 Abstract, Figure 17C, 19-22, claims	34,35,36,37 40
Y	ROUSCHE P.J. et al. "Flexible Polyimide-Based Intracortical Electrode Arrays with Bioactive Capability" IEEE Trans. On Biomedical Engineering, Vol. 48, No. 3 March 2001 Figures, Section II Manufacturing Techniques	31,40
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C <input checked="" type="checkbox"/> See patent family annex		
<p>* Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&amp;" document member of the same patent family</p>		
Date of the actual completion of the international search 23 October 2003		Date of mailing of the international search report 31 OCT 2003
Name and mailing address of the ISA/AU AUSTRALIAN PATENT OFFICE PO BOX 200, WODEN ACT 2606, AUSTRALIA E-mail address: pct@ipaustalia.gov.au Facsimile No. (02) 6283 3929		Authorized officer  <b>DALE E. SIVER</b> Telephone No. : (02) 6283 2196

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU03/01288

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2001/0039374 A1 (SCHULMAN) 8 November 2001 Abstract, figures 6B, 7, page 5 sections [0050] to [0053]	35,37
A	US 5833714 A (LOEB) 10 November 1998 Abstract	1
A	ZIAIE, B. et al. "A hermetic glass-silicon micropackage with high-density on-chip feedthroughs for sensors and actuators" Journal of Microelectromechanical Systems September 1996	35,37

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU03/01288

**Box I** Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos :  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos :  
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos :  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a)

**Box II** Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. Claims 1-30 for a method of forming an electrically conducting feedthrough with steps, characterised by a conductive structure with sacrificial and non-sacrificial components.
  2. Claims 31-33 for a feedthrough formed from a film or shim of an electrically conductive metal or alloy.
  3. Claims 34-50 The characterising portions of independent claims 34, 35, 36, 37, 40 include a feedthrough with an insulating layer, conductive members with ends and variations to the geometry of the conducting members.
1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims
  2. ☒ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
  3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
  4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

**Remark on Protest**

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/AU03/01288

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report		Patent Family Member			
US	6414835	US	2002166618		
US	6336269	AU	30737/97	AU	30739/97
		AU	31366/97	AU	41598/96
		AU	41600/96	AU	42376/96
		AU	59397/96	AU	59640/96
		AU	59657/96	AU	60287/96
		AU	66352/96	CN	1135268
		CN	1191500	CN	1197514
		CN	1225724	EP	0729652
		EP	0792463	EP	0792517
		EP	0795200	EP	0828582
		EP	0839321	EP	0839322
		EP	0859686	EP	0886894
		EP	1198001	EP	1232828
		EP	1262782	EP	1321978
		JP	2000067953	JP	2000124397
		JP	2001156223	JP	2002359269
		JP	2003179110	JP	2003218180
		KR	2000011125	US	5476211
		US	5772451	US	5773780
		US	5820014	US	5829128
		US	5852871	US	5864946
		US	5884398	US	5897326
		US	5912046	US	5917707
		US	5974662	US	5983493
		US	5998228	US	5998864
		US	6029344	US	6032356
		US	6049976	US	6064213
		US	6110823	US	6150186
		US	6184053	US	6184587
		US	6242803	US	6246247
		US	6274823	US	6279227
				AU	31277/97
				AU	41599/96
				AU	42839/96
				AU	59641/96
				AU	63777/96
				CN	1171167
				CN	1208368
				EP	0792462
				EP	0792519
				EP	0837750
				EP	0839323
				EP	0898712
				EP	1241481
				JP	11126800
				JP	2001077250
				JP	2003177144
				JP	2003232809
				US	5601740
				US	5806181
				US	5832601
				US	5878486
				US	5900738
				US	5926951
				US	5994152
				US	6023103
				US	6042712
				US	6090261
				US	6168974
				US	6215670
				US	6252175
				US	6330164

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU03/01288

Information on patent family members

	US	6442831	US	6476333	US	6483328	
	US	6525553	US	2001002340	US	2001002341	
	US	2001002624	US	2001009724	US	2001015652	
	US	2001020545	US	2001020546	US	2001038030	
	US	2001054905	US	2002004320	US	2002019152	
	US	2002023773	US	2002053734	US	2002067181	
	US	2002080588	US	2002117330	US	2002145032	
	US	2003038647	US	2003062398	US	2003107394	
	WO	9514314	WO	9615458	WO	9615459	
	WO	9615551	WO	9616440	WO	9617378	
	WO	9637331	WO	9637332	WO	9637333	
	WO	9637334	WO	9637931	WO	9638858	
	WO	9716866	WO	9743653	WO	9743654	
	WO	9743656	WO	9744676			
US	2001039374	AU	36648/99	AU	93145/98	EP	1030715
		EP	1040848	US	5999848	US	6259937
		US	6498043	US	2003078484	WO	9912607
		WO	9965388	WO	02102267		
US	5833714	US	5957958				
END OF ANNEX							